



FEEL THE HEAT!

Bench Seats for Current Polaris RZR Models

Part Number: 15-1010	Front Bench Seat - RZR 800/XP900	Black
Part Number: 15-1011	Rear Bench Seat - RZR 800/XP900	Black
Part Number: 15-1110	GT Bench Seat - RZR 900/XP1000	Black

Congratulations on your purchase of the DragonFire Bench seats for the current Polaris RZR models. These are the first aftermarket seats designed specifically to use the factory seat base. DragonFire Bench seat options provide unmatched comfort, style and quality while working with the stock cab configuration. Please see the detailed installation instructions below for reference and Feel the Heat in your new seat setup! Be sure to check out the full line of DragonFire Accessories for your Polaris vehicle at your local authorized dealer or online at <http://www.DragonFireRacing.com>

• **For bench seat, the seat was not designed to be used with sliders and must be installed in fixed position.**



- Read and understand these instructions before installing product
- This product does not provide roll over protection
- Ensure mounting hardware is securely fastened prior to use of seat
- Do not use product if there are any signs of damage

Tools Required
T27 Torx
3/8" Wrench
Torque Wrench


Disclaimer

Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

Step 1: Place vehicle on a flat and level surface. Place gear selector in "Park" and remove keys from the ignition.

Step 2: Remove seat and seat base from vehicle by pulling up on the release handle behind seat, and lifting the seat out. (Figure A)


Step 3: Flip seat upside down, placing on a clean smooth surface, and remove the 4 Torx head screws holding the seat base to the seat (Figure B). Be sure to retain all hardware, including spacers, as they will be reused on the new seat.

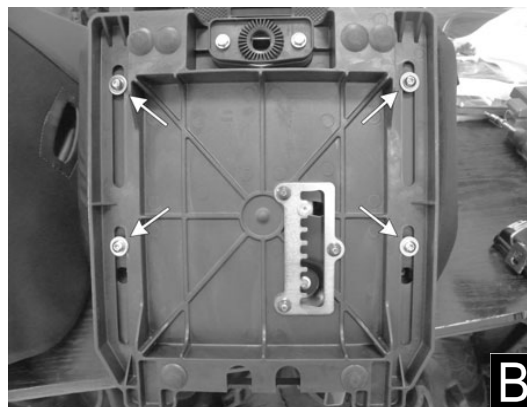

Step 4: Flip the Bench seat upside down, placing on a clean smooth surface, and install the factory seat bases with the hardware retained in **Step 3**. Install seat base hardware by placing the spacer in the track, aligning with the threaded hole in the seat, and thread in hardware. (Repeat until all 4 screws and spacers are installed, tighten all screws to 6 ft-lbs (72 in-lbs).

Note: **Figure C** shows the mounting points for the factory seat bases, and **Figure D** shows the completed installation.

Step 5: Install seat back into vehicle making sure it latches in place to complete the installation process. Our seats are designed to allow easy access to the Seat Latch in order to remove the seat (**Figure E**). Time to ride and enjoy!

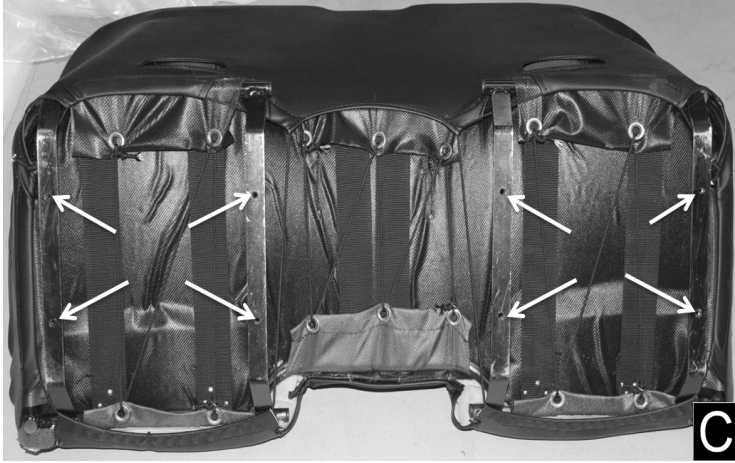

ProTip: Periodically check all hardware and re-tighten if needed.

For further assistance please contact us at customerservice@dragonfireracing.com or 1-800-708-9803.