



780 Professional Drive N. Shreveport, LA 71105 Phone (318)-524-2270 Fax (318)-524-2297

#### Read before Installation

This product is designed for use on ATVs and/or RUVs for **extreme mud riding conditions**. Purchasers should be aware that use of this product **will** increase the frequency of required maintenance, part wear, **will** raise the center of gravity on your ATV and/or RUV, will increase stopping distance, will decrease turning radius and will increase risk of roll-over, injury and death on all types of terrain.

**It is your responsibility to always inform other operators and passengers of this vehicle and about the added risks.**

Adding or modifying any OEM or aftermarket part will usually void factory warranty. This product could interfere with other aftermarket accessories. If the user has aftermarket products on machine, contact High Lifter Products to verify that they will work together. It is up to the end user or installer to verify this product works in conjunction with all other accessories installed. Adding aftermarket suspension components and/or more aggressive tires can cause breakage of other OEM driveline components such as differentials, axles or drive shafts.

We recommend that wider tires and/or wheel spacers be used to achieve a wider stance and to improve stability of the ATV or RUV. Riders should be advised that the handling characteristics of a taller ATV or RUV are different and require extra care when riding, particularly on side hills, off-camber situations, turning and stopping. If you further raise the center of gravity by adding taller tires, heavy loads, or by any other means, the ATV or RUV must be operated with even more care, at slower speeds and on relatively flat ground. All turns should be done at a slow speed, even on level ground.

Operation of an ATV and/or RUV with or without modified suspension components, while or shortly after consuming alcohol or drugs, subjects the rider to the risk of serious bodily harm or possible death. This risk is compounded if the rider does not wear an approved helmet and other safety gear. High Lifter urges that all approved safety gear be worn when riding an ATV or RUV as a driver or passenger.

By purchasing and installing this product, user agrees that should damages occur, High Lifter Products will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. High Lifter Products will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from High Lifter Products. The total liability of seller to user for all damages, losses, and causes of action, shall not exceed the total purchase price paid for the product that gives rise to the claim. **Since this is an extreme product, the manufacturer specifically disclaims any liability for consequential damages or accidents injuries, or death, in connections with the use of this product.**






If this product is not what you expected, or is not consistent with your intended use, you should return the product immediately to the seller, before installation, for a refund of the purchase price; less any fees. After installation, product is warranted for one year for defects in workmanship and materials. Axles have a one year warranty for one break. Additional breaks will be charged a repair fee depending on the problem. High Lifter Products will warranty only parts provided by High Lifter Products. Any damage or problems with OEM housings, bearings, seals, or other manufacturer's products will not be covered by High Lifter Products. Parts and products will not be warranted if item was not installed properly, misused, or modified.





#### Dealers and other Installers

You are responsible for informing your customer and end user of the information contained above and the increased potential hazards of operating an ATV or RUV equipped with modified suspension components. If you install any suspension modifying components, it is your responsibility to also install the warning label prominently in view of the driver and in prominent view of the driver and passenger on RUVs and multi-passenger ATVs. They should also be instructed to notify anyone operating the vehicle, as well as any passengers, that said vehicle is modified.

As discussed above, it is critically important that they be instructed in the need for slower speed operation, regardless of terrain, after this kit is installed.

## Parts Diagrams

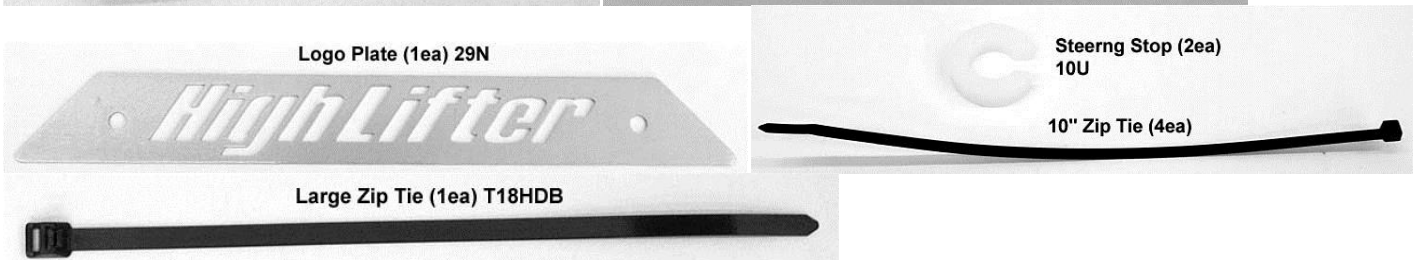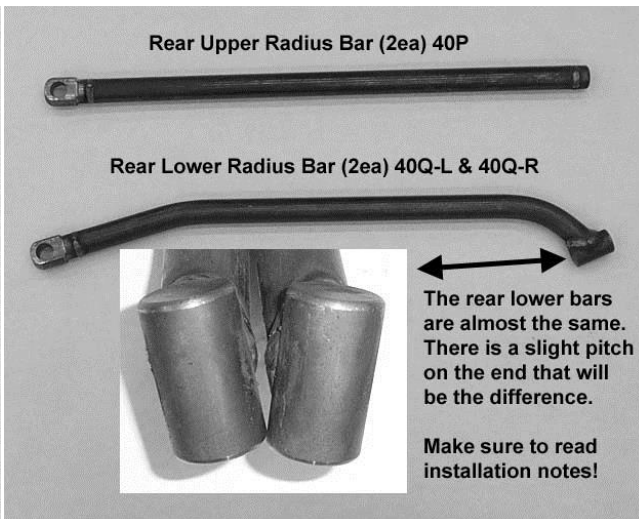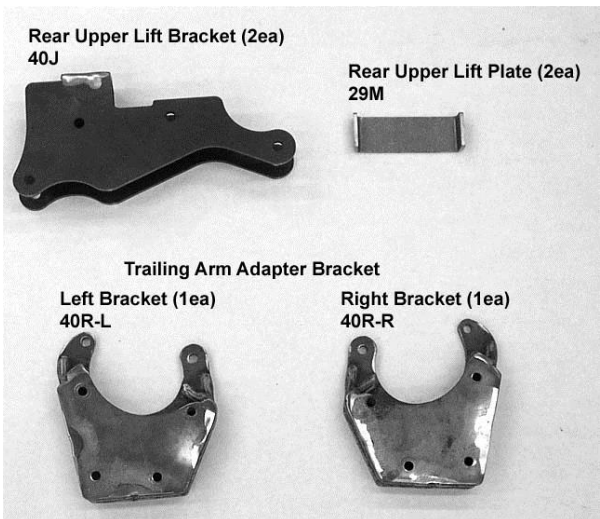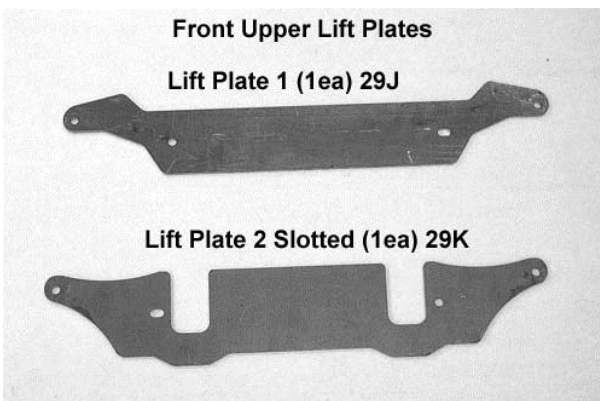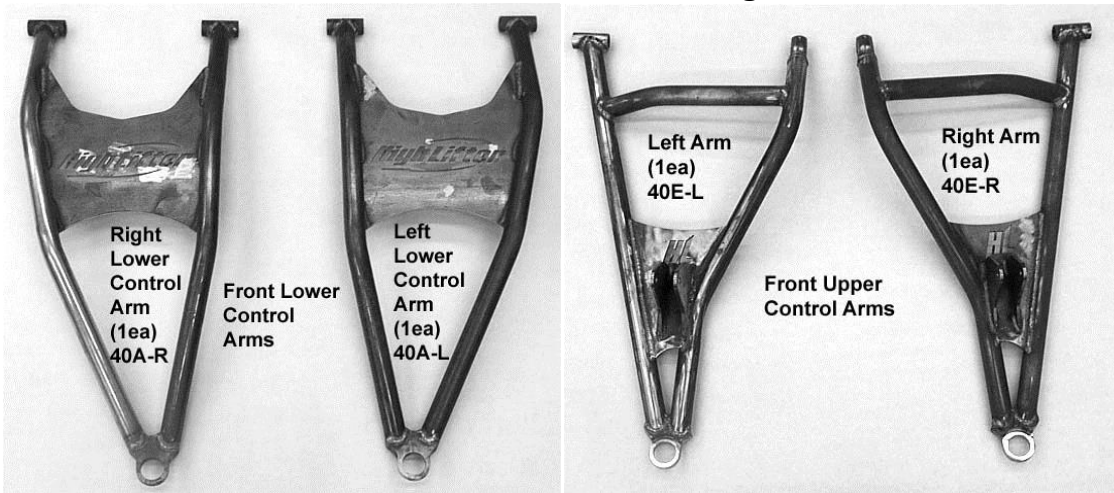

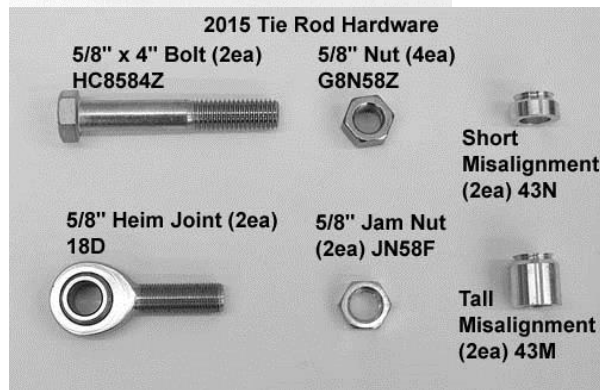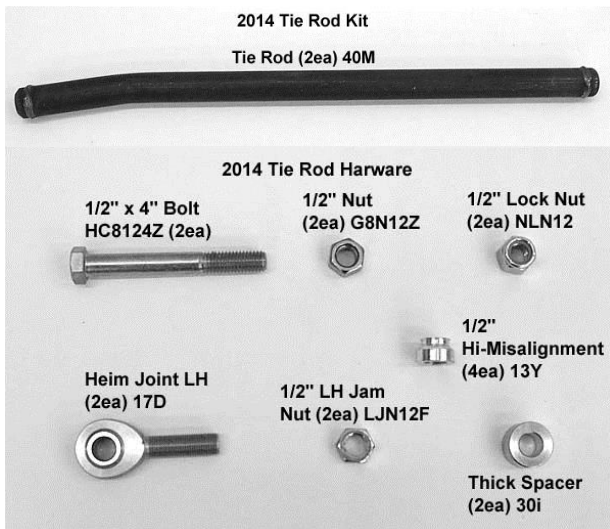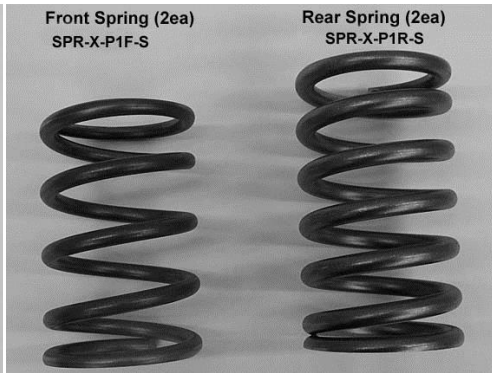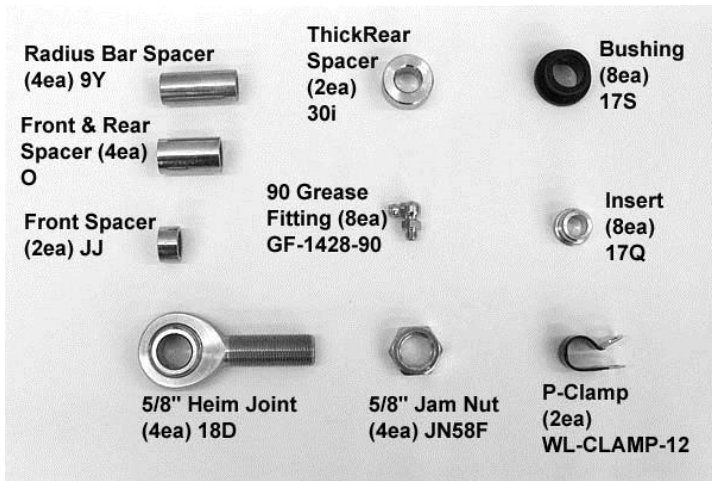

Also includes extended length heavy duty axles:  
 Front (2ea) DHT-XL-RZR1-1-F  
 Rear (2ea) DHT-XL-RZR1-1-R


## Installation Instructions

**When referring to left and right positions during the installation process, it is from the seated position!**

1. Place the jack under the center of the RZR front end and lift until the front wheels clear the ground. Be careful to support the RZR properly so that it is secure, but so that the A-arms and shocks can droop to full extension.  
**NOTE:** Make sure that the jack is tall enough to raise the ATV high enough to reinstall the tires after the lift is put on.
2. Remove the front wheels and shocks.
3. Disconnect the calipers from the knuckles and the brake lines from the A-arms. Push the calipers aside so that they do not interfere with removing the remaining factory components.
4. Next you will need to disconnect the tie rod from the knuckle assembly.
5. Remove the cotter pin and castle nut that secures the axles to the knuckle assembly.
6. Now disconnect the knuckle assembly from the upper and lower control arms. It should slide away from the axle.
7. Now pull the axle out of the differential. You may need to tug hard on the axle to pop it out of the differential.



8. Disconnect the upper and lower control arms from the frame. Do this on both sides.
9. Once you have removed the factory upper and lower arms and axles you need to remove the front differential and add the shims. You will also need to clearance the differential to be reinstalled into the frame.
10. Because the kit comes with replacement axles that have very large axle bars, these bars will hit the frame when installed. You will need to shim up the differential to gain the clearance needed to install the new bars.
11. There is a roll/spring pin that connects the differential to the drive shaft. You need to push out the roll/spring pin so that you can disconnect the differential from the drive shaft.

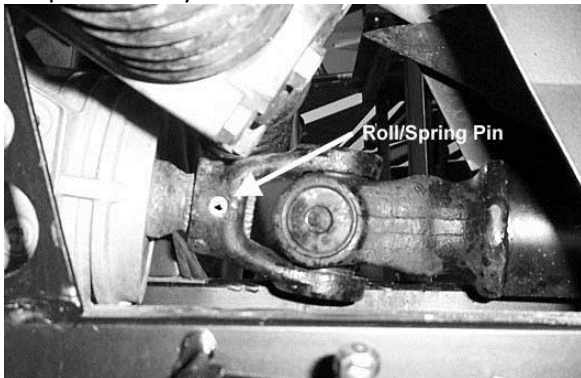

12. Disconnect the wires and vent line from the differential.




13. Remove the 4 bolts that secure the differential to the frame.

14. Remove the front differential.






15. Once you have removed the differential, you will need to clearance the rack and pinion and also trim the differential.

16. First clearance the rack and pinion. Review the photos to see the areas that will need to be trimmed.

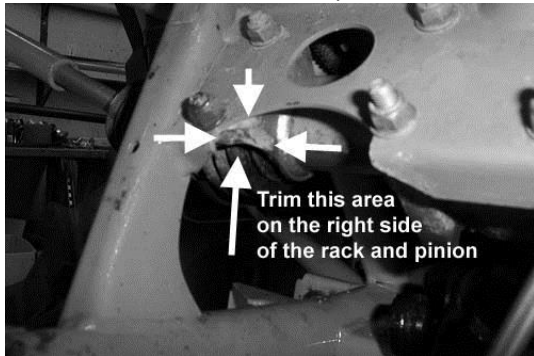

17. Next you will need to remove some of the material on the differential. Just enough so that it does not hit the frame when you install the shims.

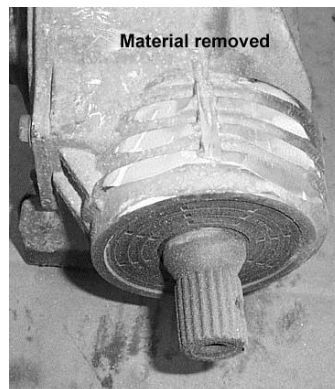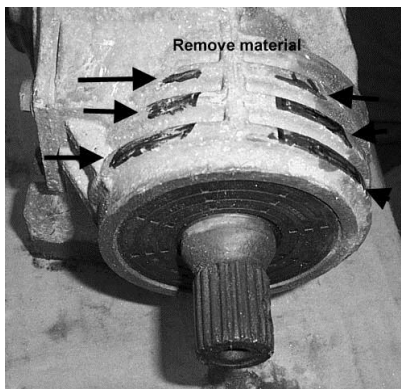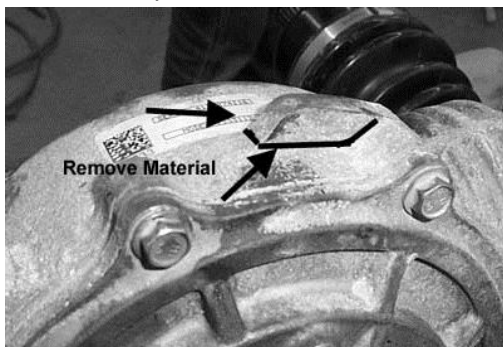


**NOTE:** You will need to test the differential in place to see if you have removed enough material. So don't secure the driveshaft to the differential until you have installed the shims and check for clearance.



18. When you have achieved the proper clearances you need to secure the differential to the frame.
19. Install the differential in place by first making sure that the roll/spring pin holes line up in the drive shaft yolk and shaft on differential. Once they are aligned insert pin.





20. Insert the two differential shims in place under the differential. The longer shim goes to the front of the differential and the shorter goes to the rear of the differential.

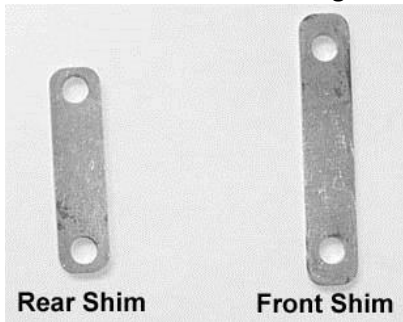

21. Once you have them under the differential, use a small punch or screwdriver to align the holes in the shims with the holes in the differential. **This is difficult!**




22. Secure the differential in place with four 10mm x 30mm bolts and 10mm washers.

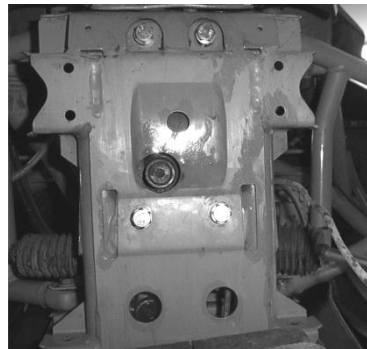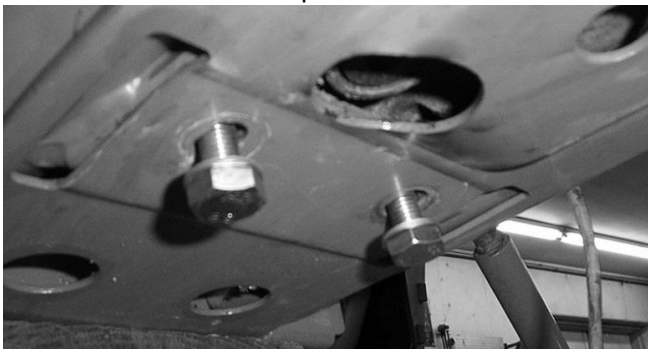


23. Reconnect wires and vent lines to the differential.

24. Before proceeding with the installation of the lift kit and new control arms, you will need to disconnect the brake lines from the master cylinder.

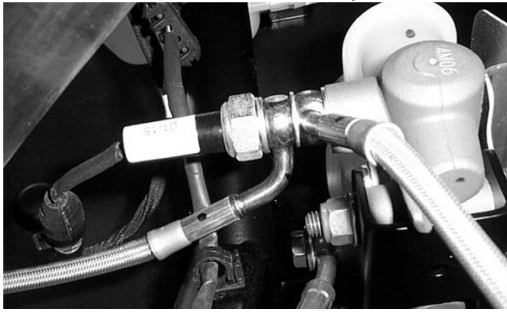


25. Disconnect and remove the left side brake line from the master cylinder and replace it with the new line provided. When you have installed the front arms you will need to route brake lines to the front of the new a-arms. This will ensure that you have no binding or pinching of the brake lines.

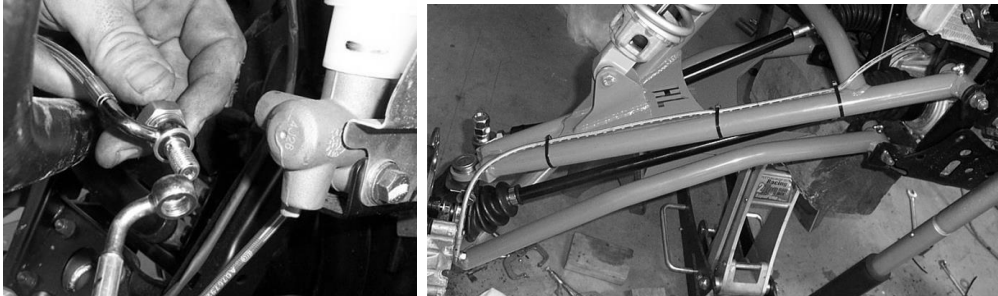

26. When you have completed the brake line installation, reconnect the lines to the calipers. Use the factory hardware to reconnect all lines.
27. The next few steps will be to prepare for the front upper and lower control arm installation.
28. Remove the bushings, sleeves, and ball joints from the stock control arms. You will need to reuse these in the new kit.



29. Now reinstall the bushings, sleeves, and ball joints into the new arms. If you place some grease on them it makes the installations easier.

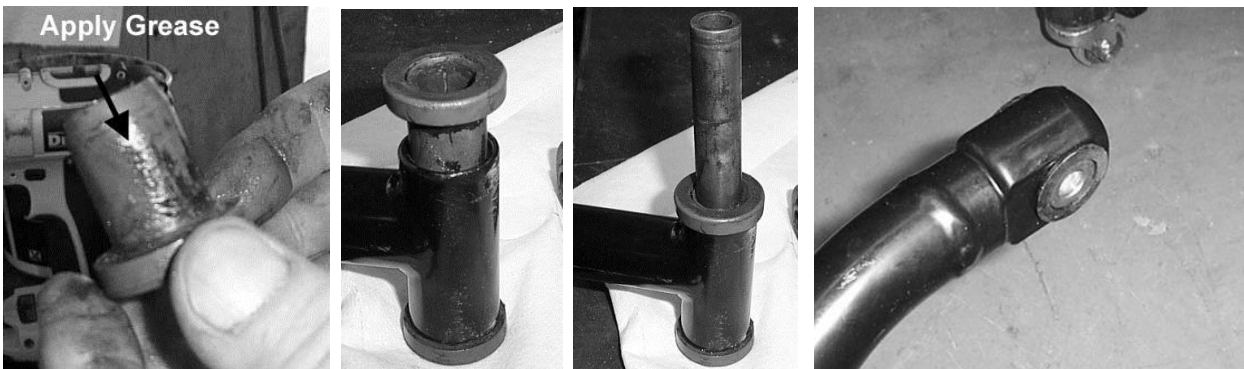

**NOTE:** A press or a vise is suggested for removing and replacing the ball joints. If you press in the ball joint crooked, DO NOT TRY TO FORCE IT IN! If you try to force it straight you can "egg" the opening. Press the ball

joint out and reinsert it into the opening, pressing it in with a vise. Verify that the clip snaps into place after installing the ball joints into the new Control Arm. You should always double check the ball joint snap ring for proper fit. Even if you use snap ring pliers, it may not seat. You can use a flathead screwdriver and a hammer to tap the snap ring to ensure that it is seated into the groove.




30. Install the grease fitting into the new arms before installation. DO NOT OVER TORQUE THE FITTINGS.




31. Set all control arms aside at this time. You need to install the lift kit to the upper portion of the frame.

32. Open the hood and you will need to reroute the headlight wires. Currently they run up from below the cross member on frame and connect to the lights.

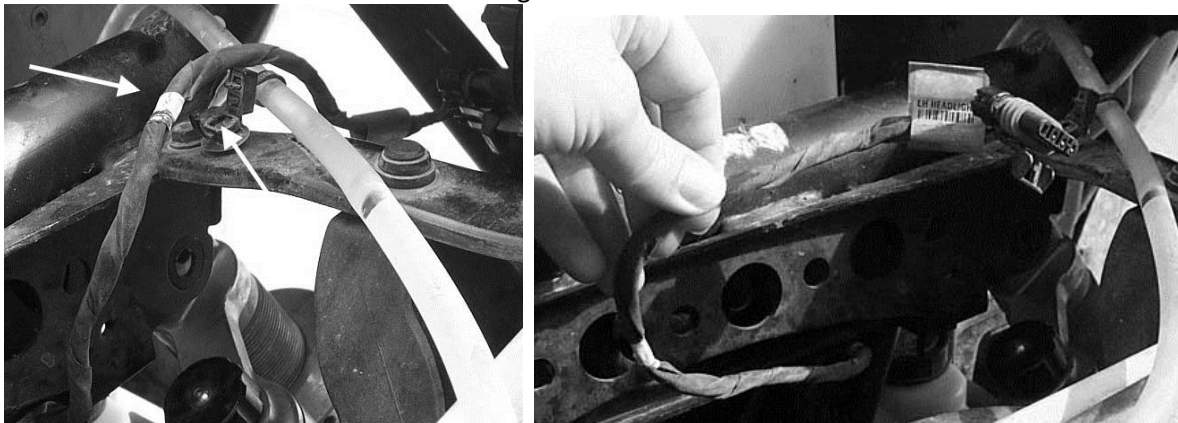



33. Run the wires behind the cross member on the frame and reconnect to the lights.

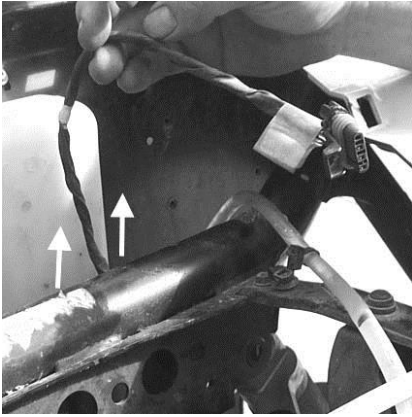


34. Disconnect the top of the front shocks.



35. Remove the shocks from both sides at this time.


36. Next insert the long front lift plate in front of the front cross member. Insert it through the hood opening.

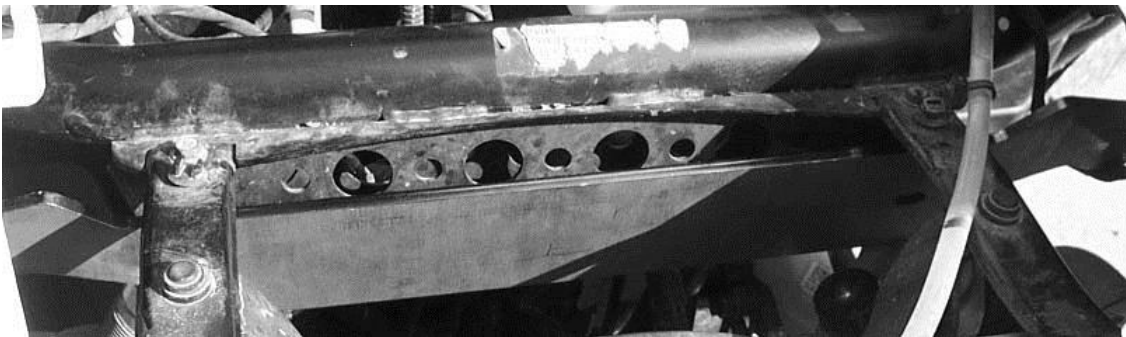


37. Insert the 10 x 70mm bolt through the bracket, placing a 10mm washer between the bracket and the shock mount.




38. Next insert a large spacer in the stock shock mount position and push the 10x70mm bolt through. Repeat steps for the opposite side at this time.

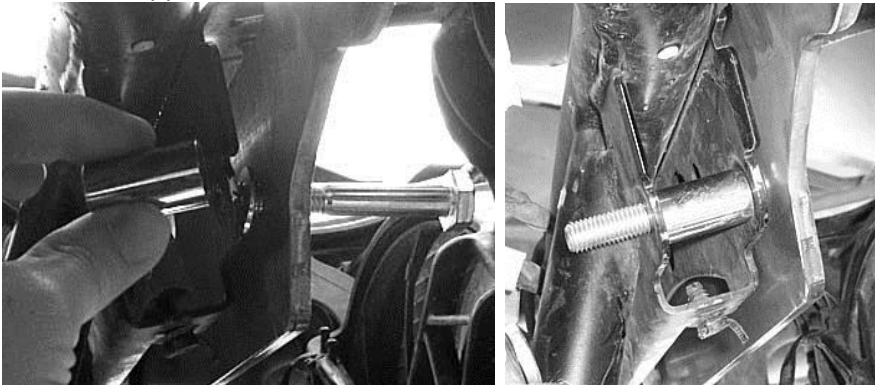

39. Insert the front slotted bracket on the backside of the front cross member.

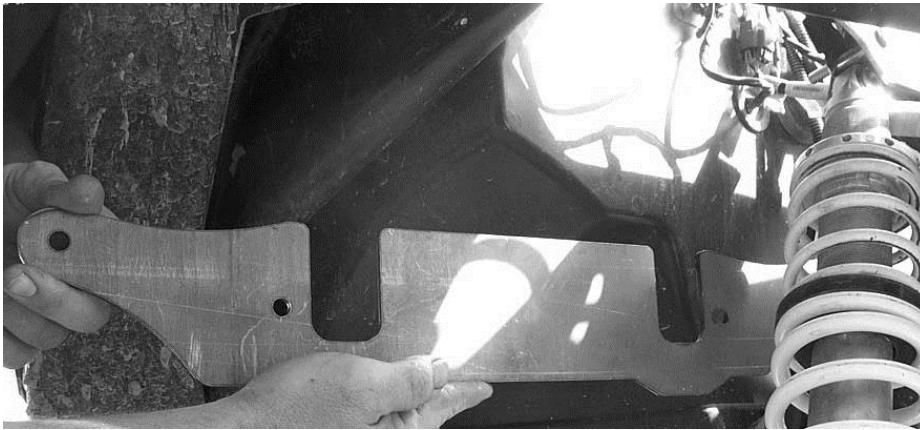


40. Connect the bracket to the frame by placing it on the bolts and fasten it using the 10mm lock nuts provided.

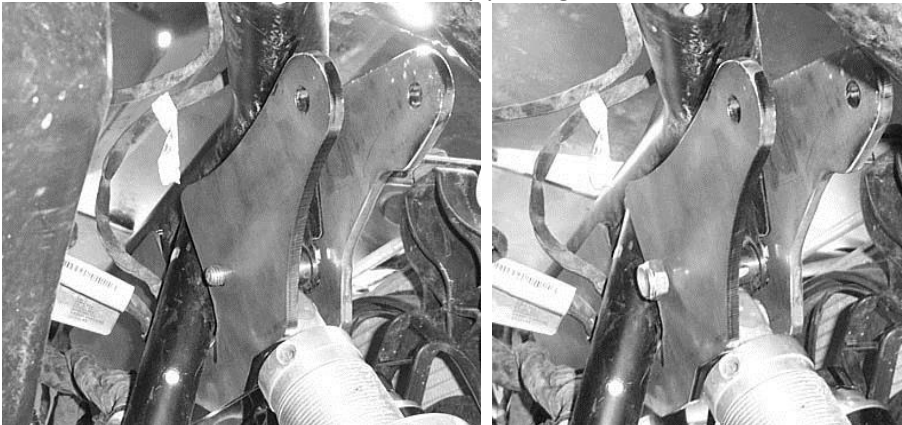

41. Do not connect the shock at this time! For ease of installation you will need to install the steering stops and tie rods at this time.
42. Start with the driver's side as this has the least amount of room to get your hands in and once you install the spacer on the passenger side you will have less play on the driver's side.
43. Turn the steering wheel all the way to the right. If you are working on the passenger side turn it all the way to the left.


**NOTE: In order to re-secure the boot you will need to turn the steering wheel closer to the center to give you some play in the boot.**

44. The boots on the rack and pinion are held on by zip ties. You will need to cut the zip tie that secures the boots to the inside of the rack and pinion.

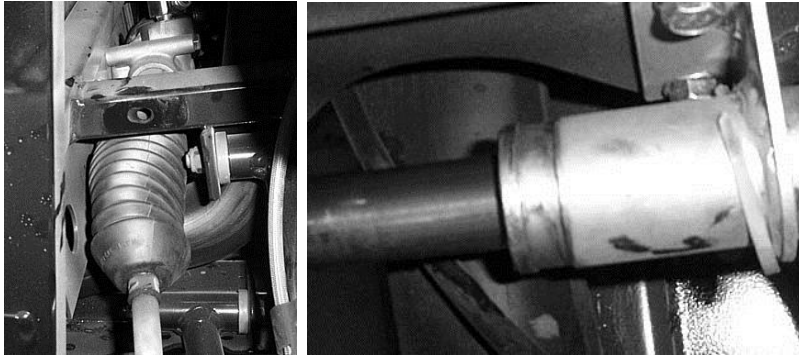

(This view is the passenger side)

45. Next pull the boot back to expose the inner tie rod joint.

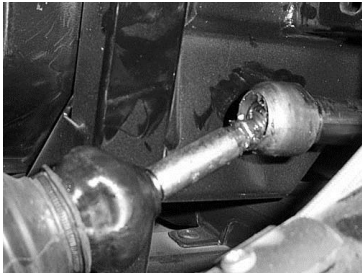


(This view is the passenger side)

**Note: On the driver's side there is already a white spacer in place on the rack and pinion from the factory. You will add the new steering stop to it. DO NOT REMOVE THE FACTORY SPACER!**




(Driver side view)

46. Place the steering stop clip between the inner tie rod joint and the rack and pinion. It is a tight fit, so you may have to force it on this is to ensure that the spacer stays in place.



47. Pull boot back over the ball joint and steering stop and refasten with zip tie. Be sure to verify the zip tie is tight so to prevent material from getting into the boot.

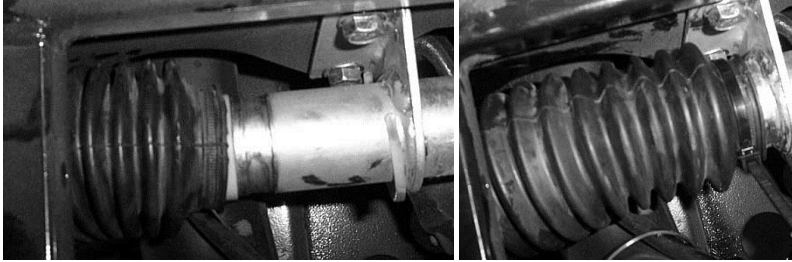


48. Once you have completed the steering stop installation you will need to connect the tie rod assembly.


**49. There will be two versions of this tie rod assembly 2015 and 2014.**

**50. 2015 Models follow the next several steps.**

51. Slide the new tie rod over the factory tie, screwing into place. (NOTES FOR HOW MUCH THREAD)

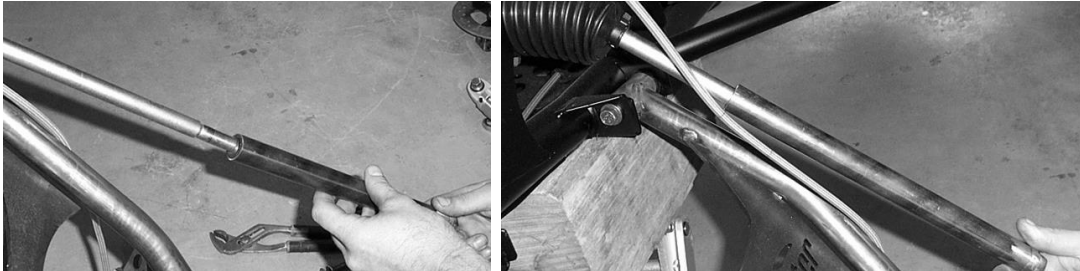


52. Next connect the smaller tie rod to the end of factory rod.

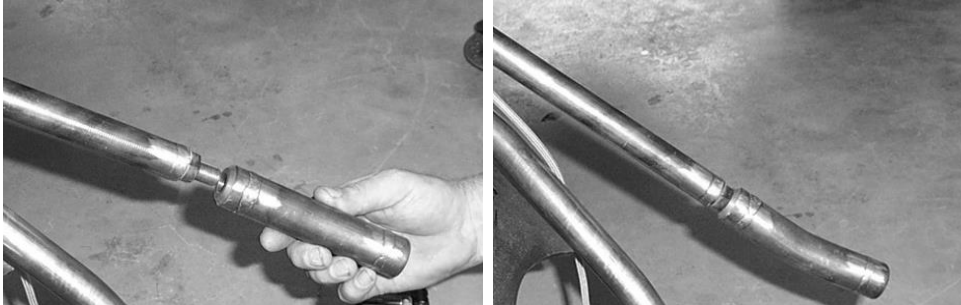

53. Get the 5/8" heim joint provided in the kit and place a 5/8" jam nut on the heim joint end. Run the jam nut all the way down to the bottom of the thread.



54. Screw the heim joint into the tie rod end. Repeat these steps for the opposite side.

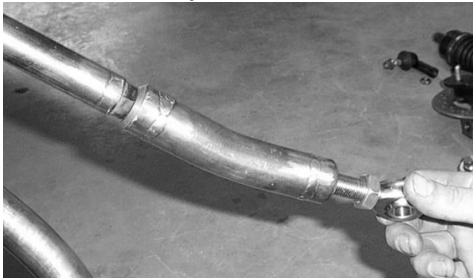

55. At this point you will need to attach the upper and lower control arms.


56. Use the factory nuts and bolts to connect the new control arms to the RUV frame. You will have left and right upper and lower control arms.



57. Install the new axles provided in the kit. Place some grease on the ends of the axles to make installation easier.

58. Reconnect the knuckle assembly, make sure to insert the new axle end into the knuckle assembly.

**NOTE: Insert ALL ball joint connecting bolts from rear to front! If this is not done the control arm will rub on the bolt at full steering lock.**

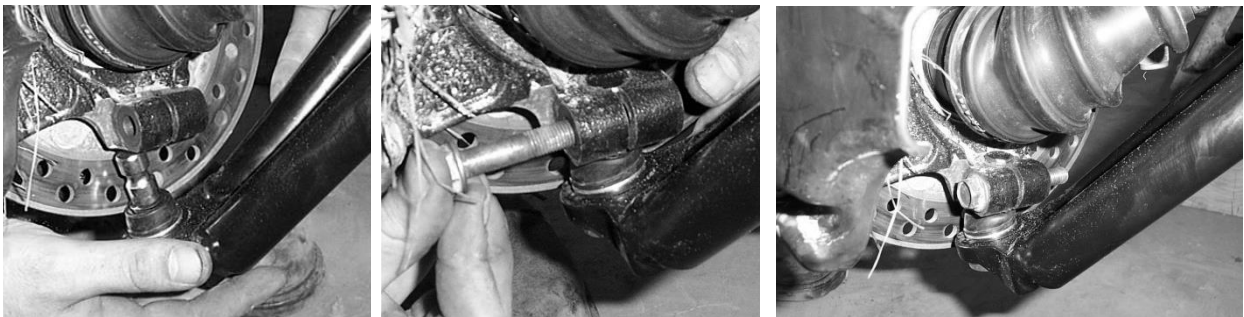

59. Included in the kit are new axle washers and a new crimp nut. You need to use two washers per axle. Fasten the axle to the hub assembly with the new crimp nut, using a punch to lock the axle nut in place.







60. Finish connecting the tie rod to the knuckle assembly by using the 5/8" x 4" bolt, long and short high misalignment cones, and two 5/8" nuts.
61. Where the original tie rod connected to the knuckle assembly you will need to drill out a 5/8" hole.




62. Once you have drilled the hole insert the bolt up from the bottom of the knuckle assembly through the hole.

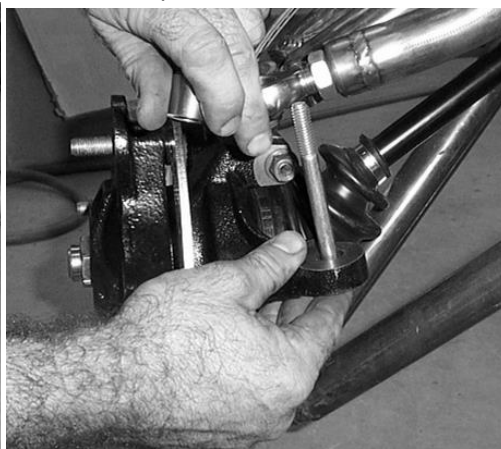


63. Place on the bolt the long high misalignment cone.

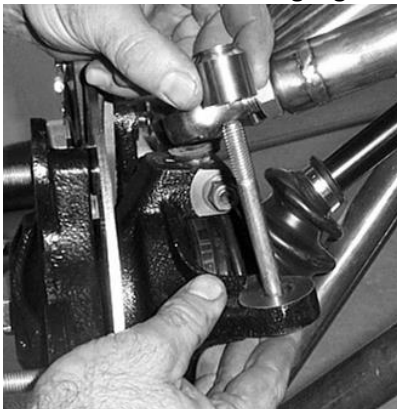


64. Now place the 5/8" heim joint on the rod end onto the bolt.

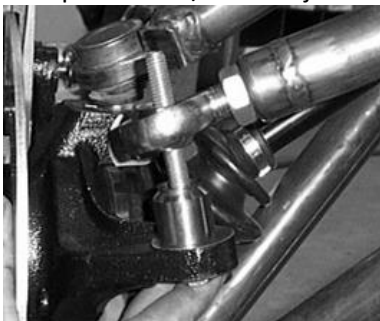

65. Place the short high misalignment onto the bolt.

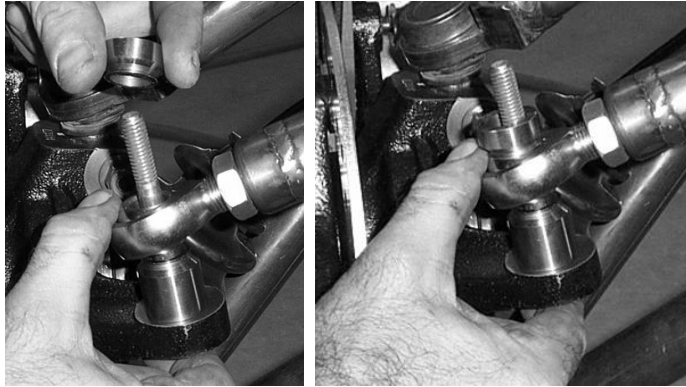

66. Secure the rod assembly using two 5/8" nuts.

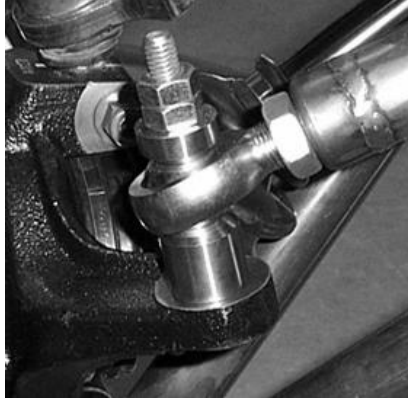

**67. Steps for 2014 tie rod installation.**

68. Connect to the tie rod provided in the kit the 1/2" left hand heim joint and 1/2" left hand jam nut.

69. Place jam nut on the heim joint, running it all the way down.

70. Now connect the heim joint to the tie rod.



71. Disconnect the factory rods from the rack and pinion.



72. Attach the new tie rod provided in the kit.



73. At this point you will need to attach the upper and lower control arms.


74. Use the factory nuts and bolts to connect the new control arms to the RUV frame. You will have left and right upper and lower control arms.




75. Install the new axles provided in the kit. Place some grease on the ends of the axles to make installation easier.

76. Reconnect the knuckle assembly, make sure to insert the new axle end into the knuckle assembly.


**NOTE: Insert ALL ball joint connecting bolts from rear to front! If this is not done the control arm will rub on the bolt at full steering lock.**

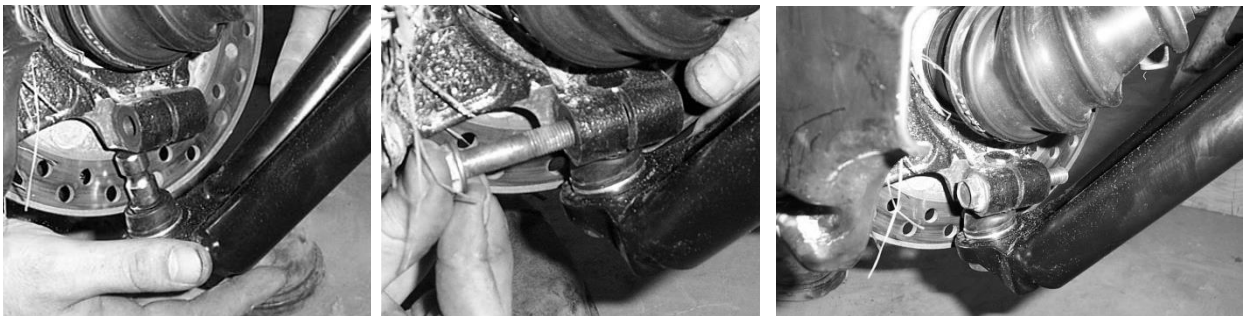

77. Included in the kit are new axle washers and a new crimp nut. You need to use two washers per axle. Fasten the axle to the hub assembly with the new crimp nut, using a punch to lock the axle nut in place.

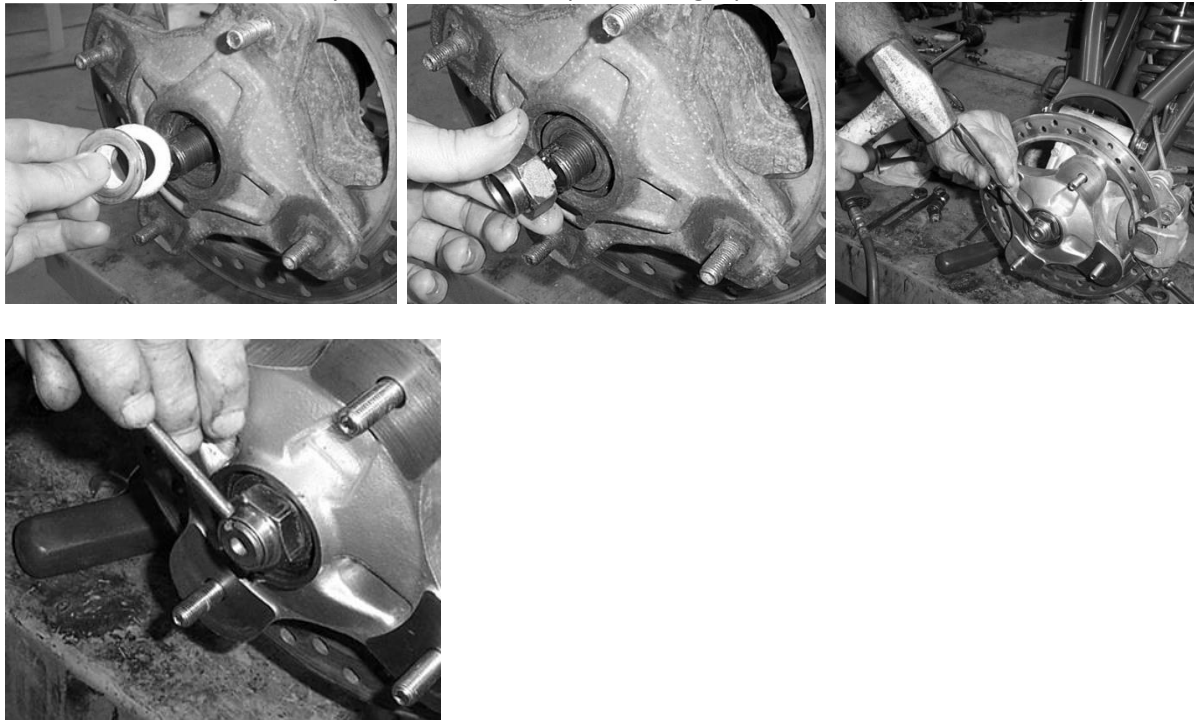

78. Where the original tie rod connected to the knuckle assembly you will need to drill out a 1/2" hole.

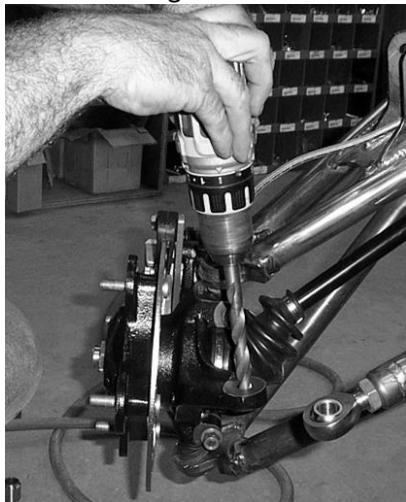


79. Now attach the tie rod end to the knuckle assembly.

80. Insert the 1/2" x 4" bolt up from the bottom through the tie rod attachment on the knuckle assembly.




81. Place a spacer and a high misalignment onto the bolt, then place the heim joint onto the bolt.

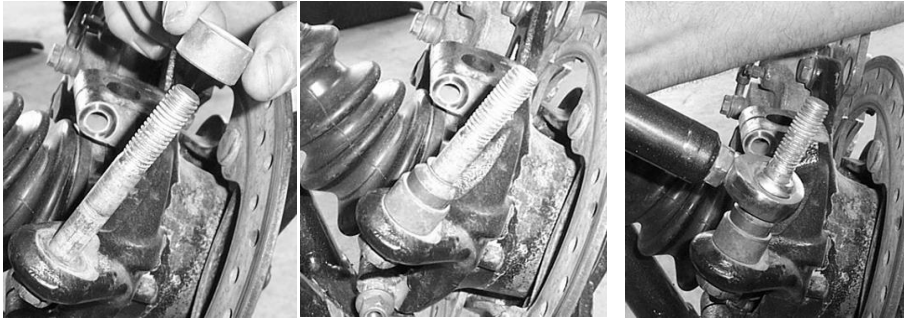

82. Now place another high misalignment onto the bolt.



83. Fasten it tight using a 1/2" regular nut and a 1/2" Nylock locking nut. Repeat steps for opposite side.

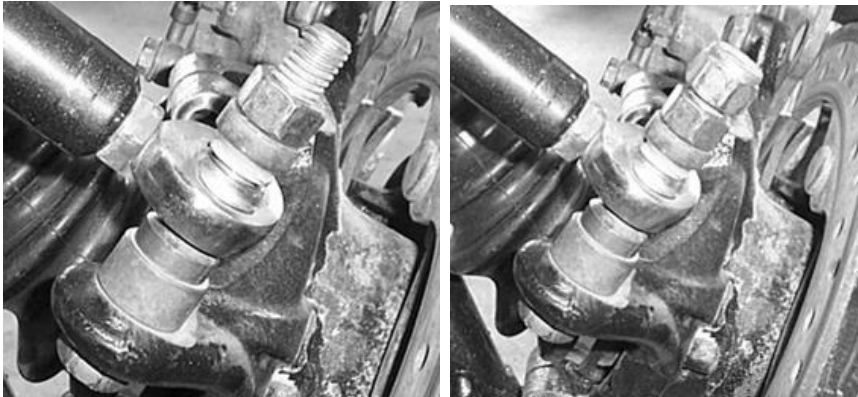

84. For the next steps you will need a spring compressor or a way to compress the factory spring.

85. Before you compress the spring on the shock you will need to adjust the tension on the shock to the lowest setting or to where the spring has the least amount of tension on it. You do this by adjusting the collar all the way down towards the shock eyelet.

**NOTE VERY IMPORTANT:** In order to keep from damaging the shock threads and spring adjuster you need to make sure that the threads are clean from dirt. The threads on the shock are easily damaged!!!






86. Compress the spring and remove the retaining collar from the shock.



87. Now remove the spring and center spring collar.

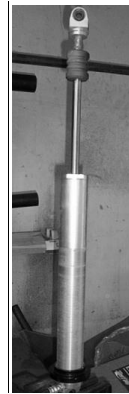

88. There are two different springs for this kit. There is a 6" tall spring with a 300 rating for the front and there is a 7" tall spring with a 400 rating for the rear. Install the 6" spring at this time. You will follow the same steps for the rear using the 7" spring.


89. Place the new spring onto the shock, (6" front & 7" rear).




90. Reinstall the center spring collar and spring. Compress the spring and reattach the spring retaining collar.



91. Before you reconnect the shock, make sure that you rotate the reservoir on the shock so that is to the front of the RZR. Repeat steps for the opposite side at this time.

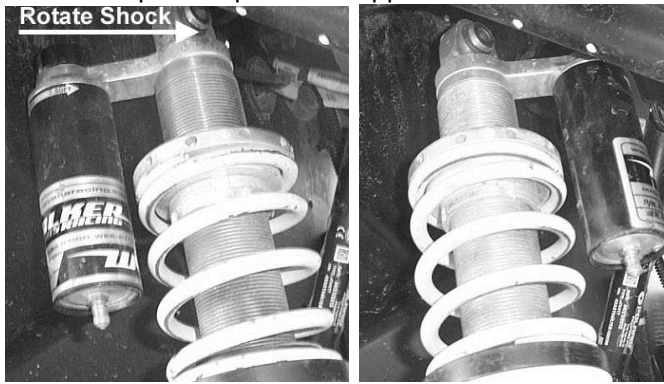

92. Connect the top of the shock to the lift plates. Insert the 10 x 70mm hex bolt through from the backside forward. Place a small front shock spacer between the shock eyelet and the lift plate. Fasten it tight using a 10mm lock nut provided.

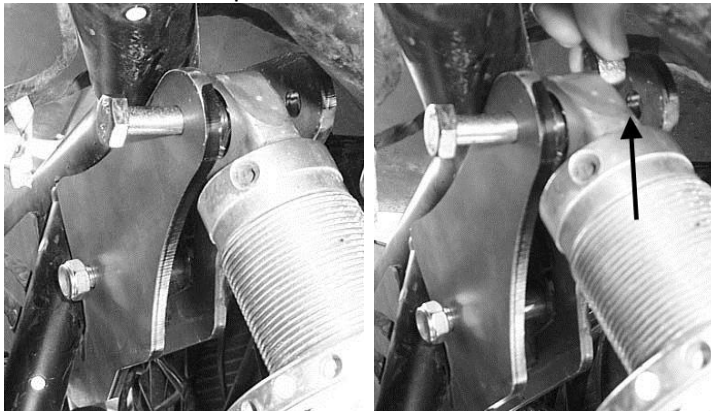

93. Repeat steps for opposite side and tighten all nuts and bolts.  
94. Now connect the bottom of the shock to the new control arms by using the 10mm x 60mm bolts and 10mm lock nuts provided in the kit. Repeat the steps for opposite side.  
95. Once you have completed the installation you will need to bleed the brake lines. Follow the steps listed below.  
96. When you have completed the brake line bleeding process, place the wheels back on the RZR and torque lugs to factory specifications.

## Brake Line Bleeding

Attach the 1 man bleeder bottle, or slip a small hose/tube over the end of the bleed screw and place the other end in a bottle/jar with a little brake fluid in it. That way as air bubbles out it can't return air back up the hose. The only thing being sucked up the hose will be brake fluid.

With the hose in place, open the bleed screw.

Being careful not to splash brake fluid everywhere, or to let the master cylinder go dry (therefore letting air back into the top of the system) depress the brake lever to force clean brake fluid into the brake line from the master cylinder. Do this 5-6 times and refill the master cylinder. You will find that you have to refill the master cylinder often as these are long brake lines and small master cylinders.

**NOTE: Make sure that the cover to the master cylinder is on before you start pumping the brakes!!!**

When you are confident that all the old fluid and air is purged from the line, close the bleed screw and move on.

After both front wheel calipers are bled, recap the master cylinder. You should now have good stiff brake pedal. It will probably take a whole pint sized bottle to do both front wheel calipers. Don't try to save the extra fluid and dispose of used fluid properly.

## Master Cylinder/Brake Fluid

An over-full master cylinder may cause brake drag or brake lock-up, which could result in an accident. Maintain brake fluid at the recommended level. Do not overfill. Never store or use a partial bottle of brake fluid. Brake fluid is hygroscopic, meaning it rapidly absorbs moisture from the air. The moisture causes the boiling temperature of the brake fluid to drop, which can lead to early brake fade and the possibility of brake failure, which could result in an accident. After opening a bottle of brake fluid, always discard any unused portion.

**Check the brake fluid in the master cylinder before each ride.**

1. Position the unit on a level surface.
2. Position the handlebars so the master cylinder is level.
3. View the brake fluid level through the indicator window on the top of the master cylinder.
4. If the fluid level is low, remove the cover and add fluid to the fill line.

Do not overfill. Use DOT 4 brake fluid only.

5. Reinstall the cover.


## Rear Installation

**When referring to left and right positions during the installation process, it is from the seated position!**


1. Place the jack under the center of the RZR rear end and lift until the rear wheels clear the ground. Be careful to support the RZR properly so that it is secure, but so that the trailing arms and shocks can droop to full extension.

**NOTE:** Make sure that the jack is tall enough to raise the RZR high enough to reinstall the tires after the lift is put on.

2. You will need to completely remove the rear trailing arms, rear shocks, rear radius bars, and disconnect the rear plastic from the frame so that you can lift it to install the upper lift brackets.
3. Before you jack up the UTV make sure to disconnect the rear sway bar from the arms.

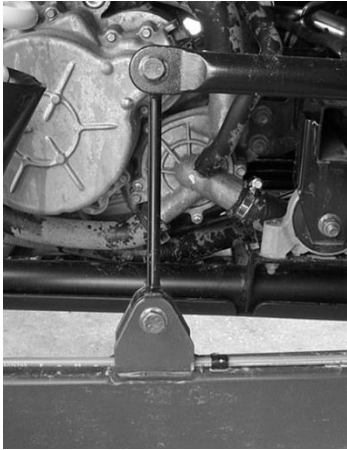


4. Once you have disconnected the sway bar from the arms remove any factory or aftermarket rock guards. This may not apply to everyone just those UTV's equipped with the rock guards.

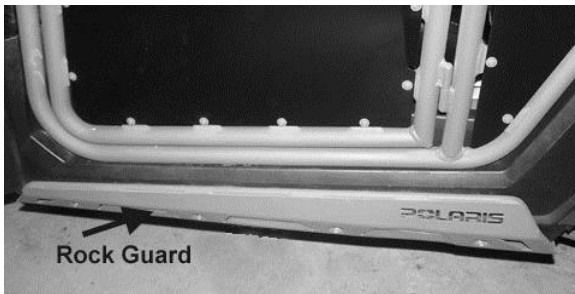

5. Next, jack up the rear of the UTV, securing it properly so that it does not fall, but it allows the arms to drop to full extension. Remove rear factory tires.
6. Disconnect the brake lines from the arms. Retain your factory p-clips for use later.



7. Disconnect the caliper/knuckle/hub assembly and radius bars from the factory trailing arms.

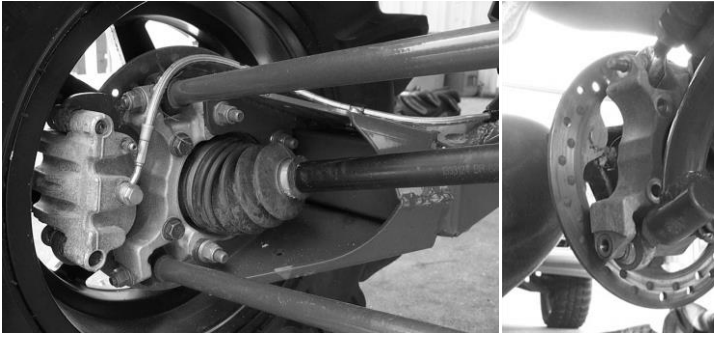

8. Next, completely disconnect the shocks from the arm shock mount point and from the upper portion of the frame. You will need to remove the shock dust shield from the shock. It will not work in conjunction with the new arm.




9. Now, disconnect the arm from the frame.

**NOTE: If you ordered the 10" kit without the rear trailing arms do not disconnect the rear trailing arms from the unit. Leave them attached!!**






10. Disconnect the rear stock upper and lower radius rods from the frame.

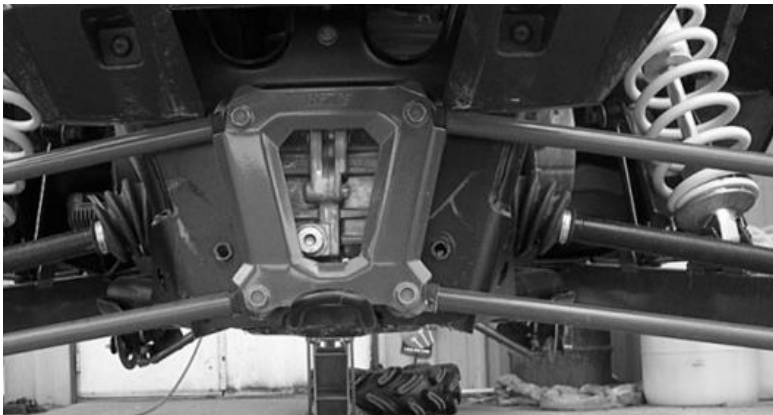




11. Remove the factory axles from the differential by giving them a hard tug.
12. Remove both rear plastic fenders, Roll cage bars and shock reservoirs. **(The shock reservoirs only apply to NON-HLP Editions)** Remove all screws holding the rear plastic behind the seats too!

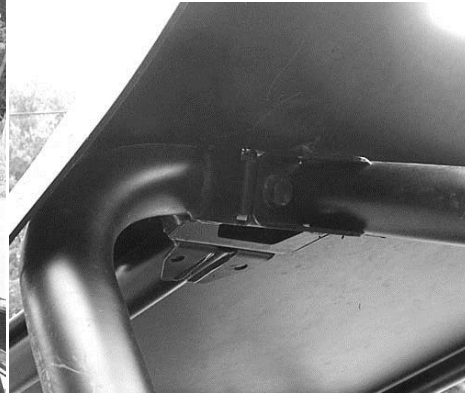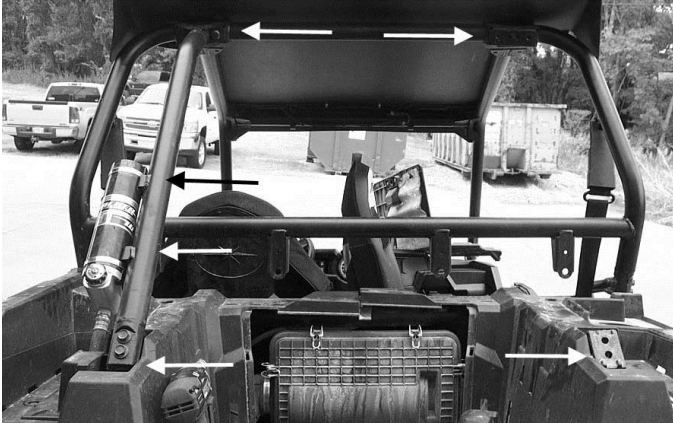


13. You may need to remove the air intake hose for clearance while installing the lift brackets.

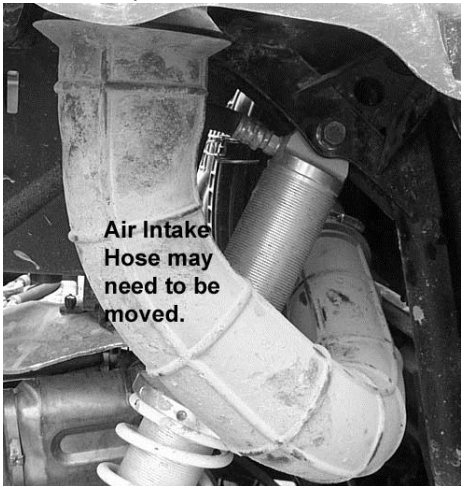


14. Disconnect the top of the rear shock from the shock tabs if you have not done so already.  
NOTE: When you reconnect the top of the shock to the lift bracket, you may need to compress the eyelet to allow it to fit into the bracket with the spacer.




15. There is a support bracket that needs to be unbolted to allow for the lift bracket to slide into place. Unbolt bracket, slid the lift bracket into place then reattach the factory bracket.

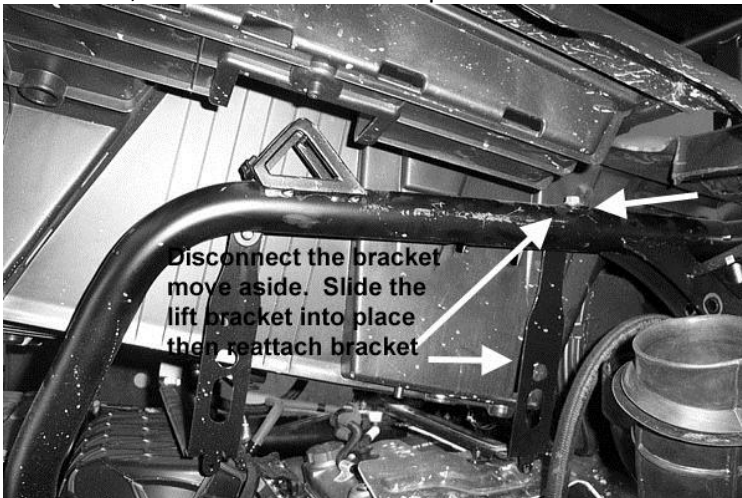


16. Insert the rear lift bracket through the plastic onto the frame.

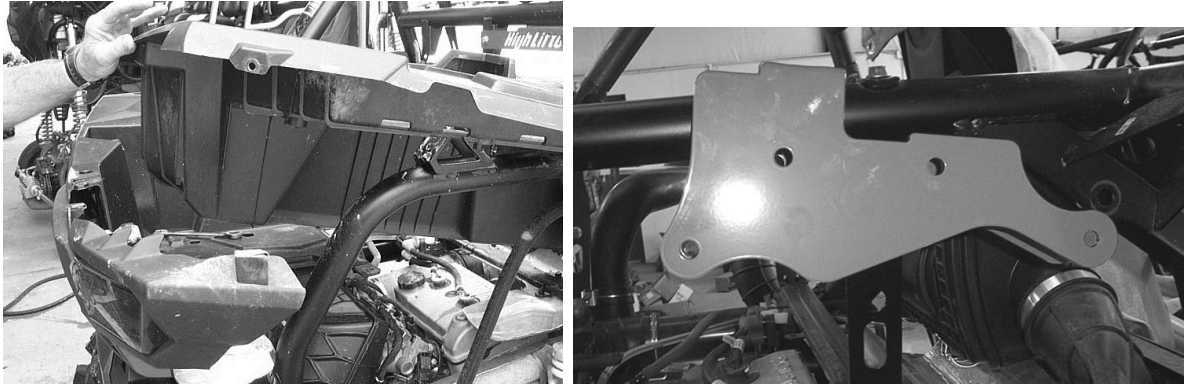


17. Once you have the bracket in place connect it to the stock shock mounting tabs using the 12x70mm bolt and 12mm washer provided in the kit. Make sure that you insert the 12mm washer between the shock mounting tab and the bracket.

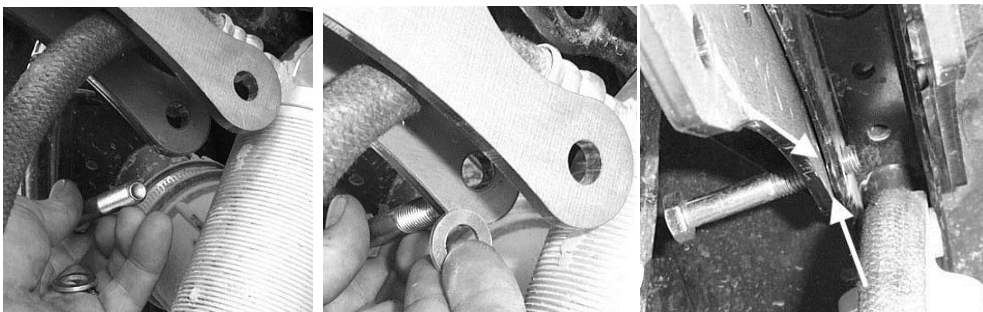


18. Next, place a spacer where between the shock mount tabs. Then, insert another 12mm washer between the shock tab and the bracket.

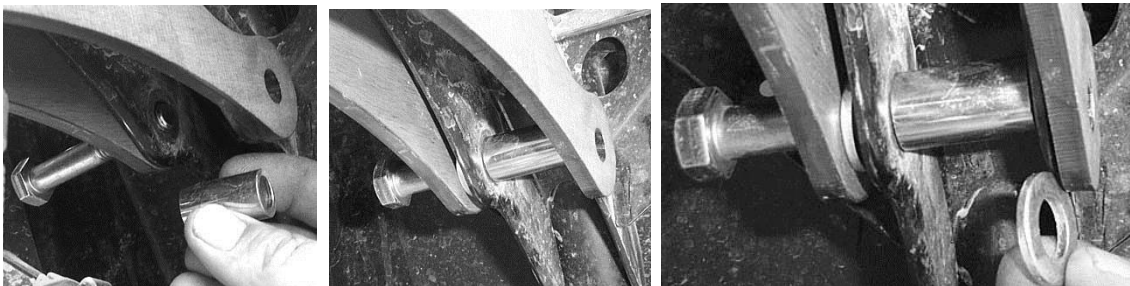


19. Push the bolt completely through, but you do not need to attach the 12mm lock nut at this time.

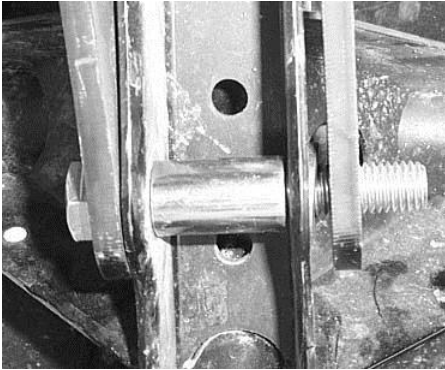


20. Next you need to attach the rear lift plate. Insert a 12x70mm hex bolt through the bracket.

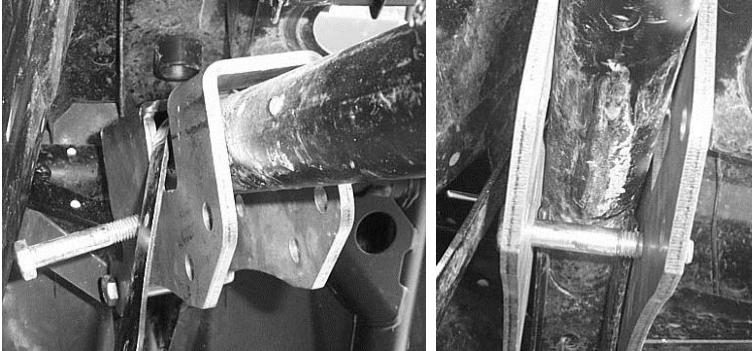


21. Insert the rear lift plate into the lift bracket and hook the bolt.

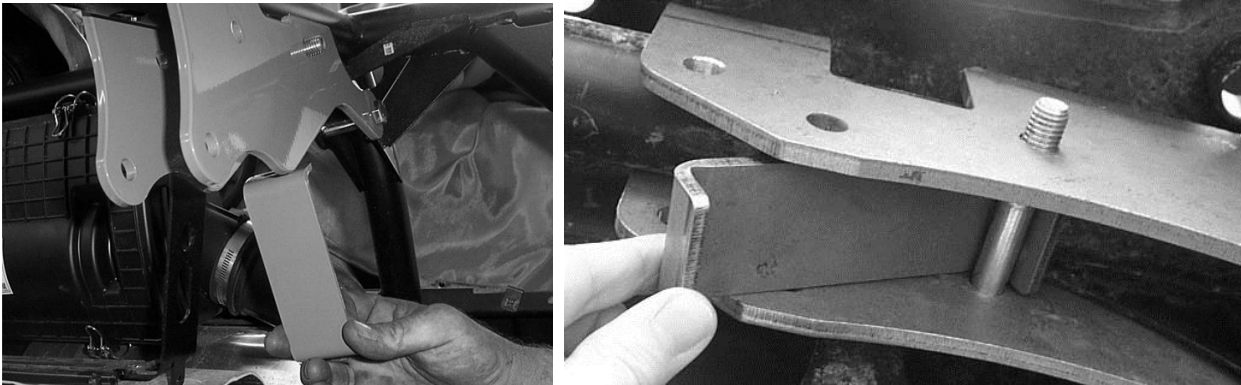

22. Push the rear lift plate all the way up touching the frame and insert a 12x70mm hex bolt.

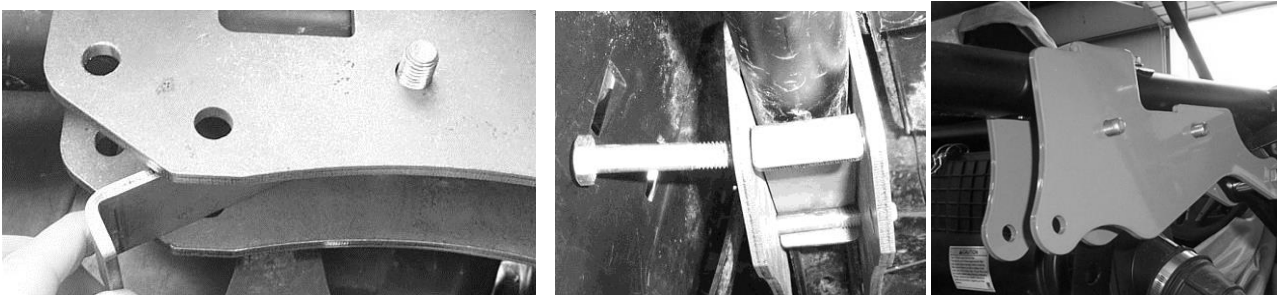


23. Now loosely attach the 12mm lock nuts to all bolts.

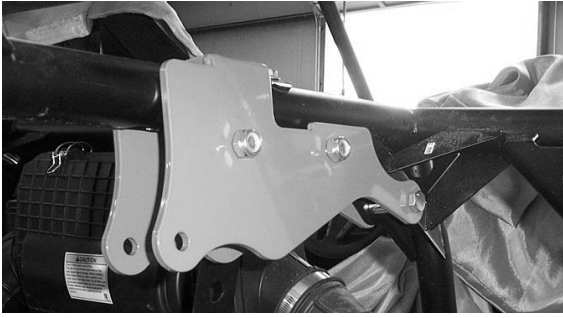

24. For the next steps you will need a spring compressor or a way to compress the factory spring. Use the same steps as you did for the front.

25. Before you compress the spring on the shock you will need to adjust the tension on the shock to the lowest setting or to where the spring has the least amount of tension on it. You do this by adjusting the collar all the way down towards the shock eyelet.


**NOTE VERY IMPORTANT: In order to keep from damaging the shock threads and spring adjuster you need to make sure that the threads are clean from dirt. The threads on the shock are easily damaged!!!**

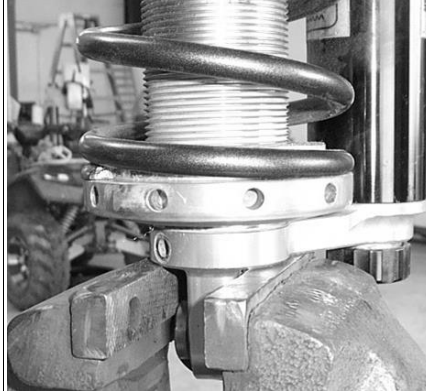

26. Compress the spring and remove the retaining collar from the shock.



27. Now remove the spring and center spring collar.

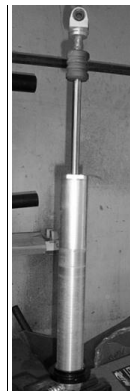

28. There are two different springs for this kit. There is a 6" tall spring with a 300 rating for the front and there is a 7" tall spring with a 400 rating for the rear. Install the 6" spring at this time. You will follow the same steps for the rear using the 7" spring.

29. Place the new spring onto the shock, (6" front & 7" rear).






30. Reinstall the center spring collar and spring. Compress the spring and reattach the spring retaining collar.




31. Now connect the top of the shock to the lift brackets by inserting another 12x70mm bolt through the bracket. Insert the rear shock spacer between the shock eyelet and bracket.

**Note: You may need to compress the shock eyelet to allow the shock and spacer to fit in between the bracket.**

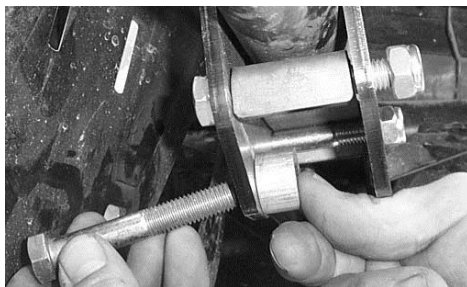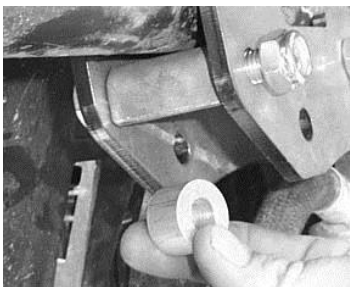



32. Fasten tight using a 12mm lock nut.

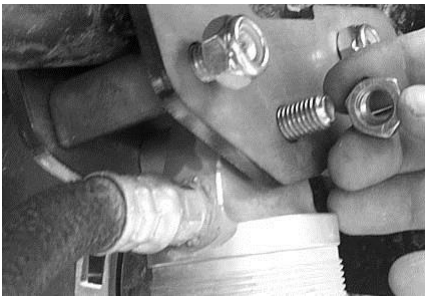

33. Reattach plastic fenders, Roll cage bars and shock reservoirs. **(The shock reservoirs only apply to NON-HLP Editions)** Reattach all screws holding the rear plastic behind the seats too!

34. Insert the new rear axles into the differential at this time. You need to put a little axle grease on the axle ends to make the installation easier.

35. You will need to reuse your factory spherical bearing, bushings, seal, and retaining clip located in the factory arm. We recommend that you check it for wear. Now insert all into the new High Lifter Trailing Arm.


**NOTE: Only do this step if you purchased the kit that included the new trailing arms.**




36. Before you install the trailing arm you will need to attach the new rear upper and lower radius bars.

**NOTE: There are LEFT and RIGHT Lower Radius Bars!! On the end of the lower bar where the heim joint connects will have a slight turn on it. When mounted on the RZR they need to be mounted with the turn pointing towards the front of the RZR.**

37. You need to preassemble the new bars. Insert the two black rubber bushings into open end of the radius bar. Make sure to add a little grease to the bushings, this will make the installation easier.




38. Next insert one sleeve in to the bushings.

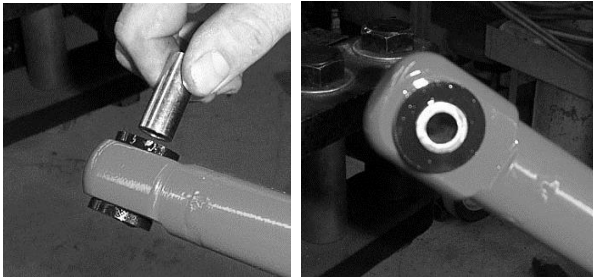



39. Now thread the jam nut onto the heim joint. Run it all the way down to the bottom of the threads and screw the heim joint into the radius bar



40. Insert the two heim adapters into the eyelet of the heim joint.

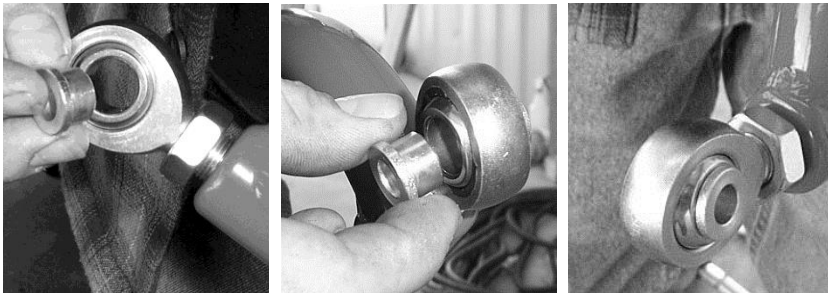


41. Attach the ends of the radius bars to the RZR frame using the 10x65mm Hex Bolts, 3/8" Flat Washer provided and the stock flat washer, and 10mm Lock Nuts provided in the kit.

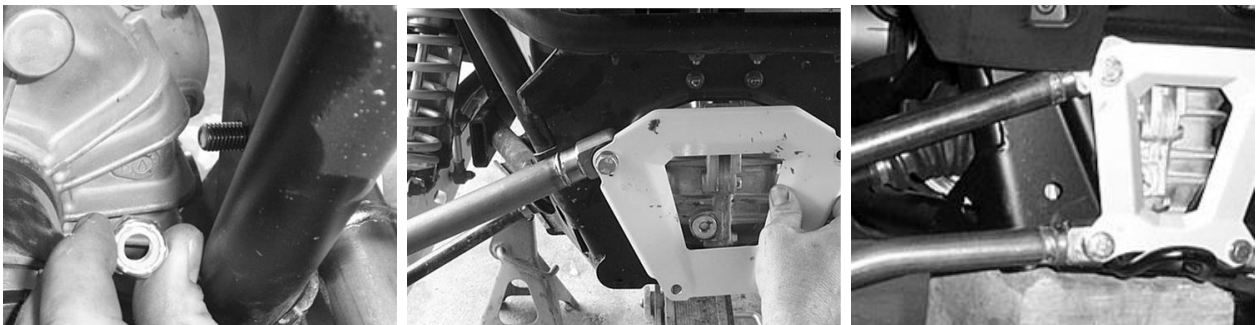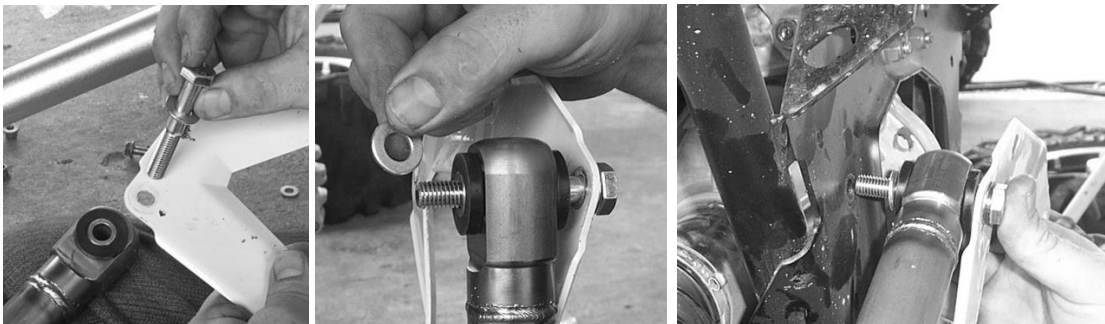


42. Once you have installed the factory bearing, bushings, seal and retaining clip, connect the new trailing arm to the frame using the stock nut and bolt that held the factory trailing arm in place.

**NOTE: Skip this step if you are using your factory trailing arms! They are already attached.**

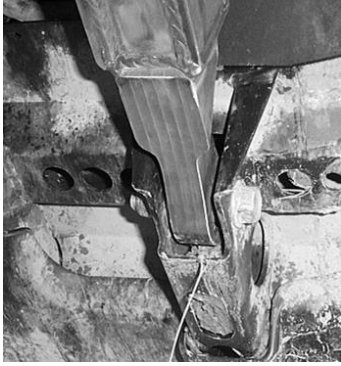


43. Connect the shock to the trailing arm using the factory bolt and lock nut.

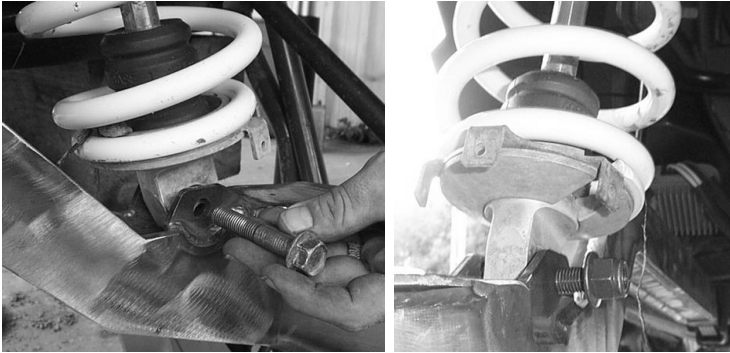


44. Connect the trailing arm adapter plate to the trailing arm.

**NOTE: The image shown is with the High Lifter Trailing arm, but it connects to the factory the same way!**

45. Use three 10mm x 70mm bolts and one 10mm x 35mm bolt and four 10mm lock nuts to attach the plate to the trailing arm. The 10mm x 35mm bolt will be inserted into the lower hole on the adapter plate. It will not go all the way through the plate, it will only go to the inside.

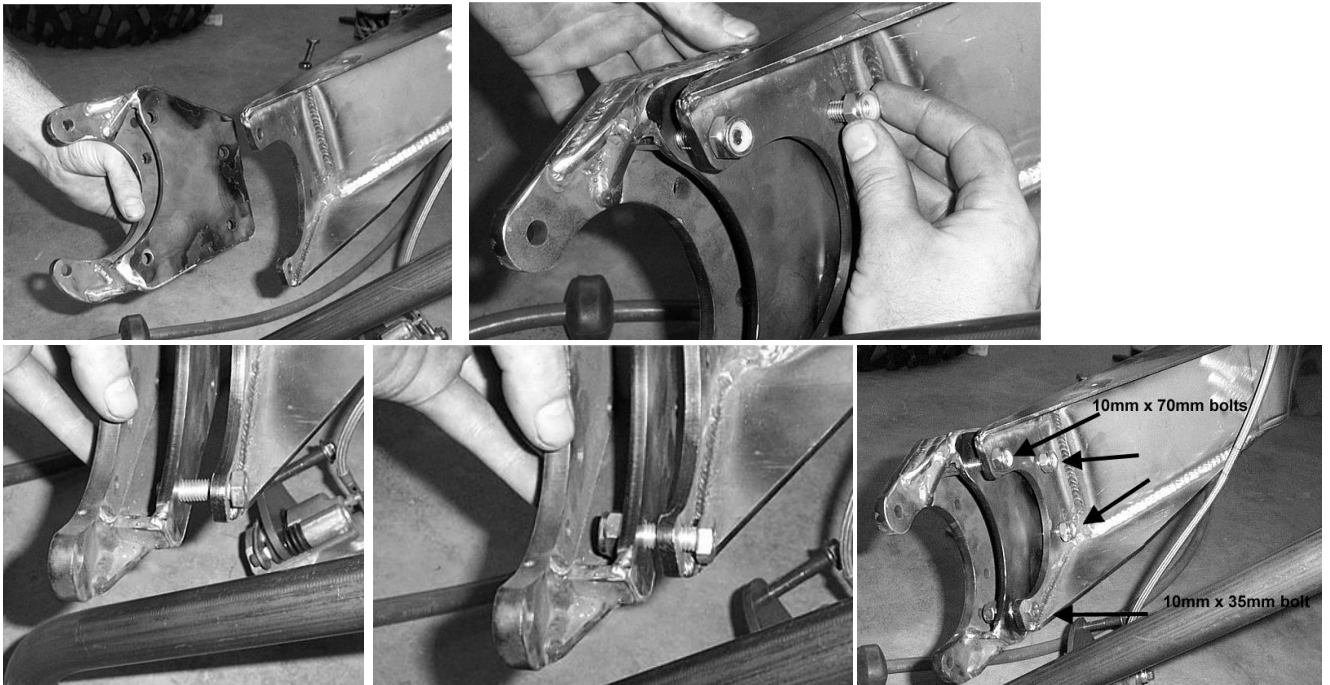

46. Connect the rear knuckle assembly to the trailing arm using the factory hardware.

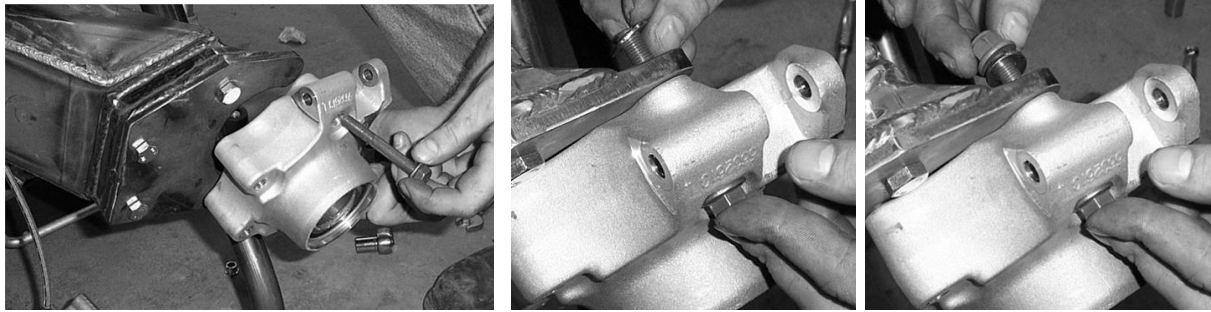

47. Insert the axle into the knuckle and hub assembly.




48. Included in the kit are new axle washers and a new crimp nut. You need to use two washers per axle. Fasten the axle to the hub assembly with the new crimp nut, using a punch to lock the axle nut in place.




49. Connect the brake caliper before you connect the rear radius bars to the hub assembly.

50. Attach the calipers using the factory hardware.

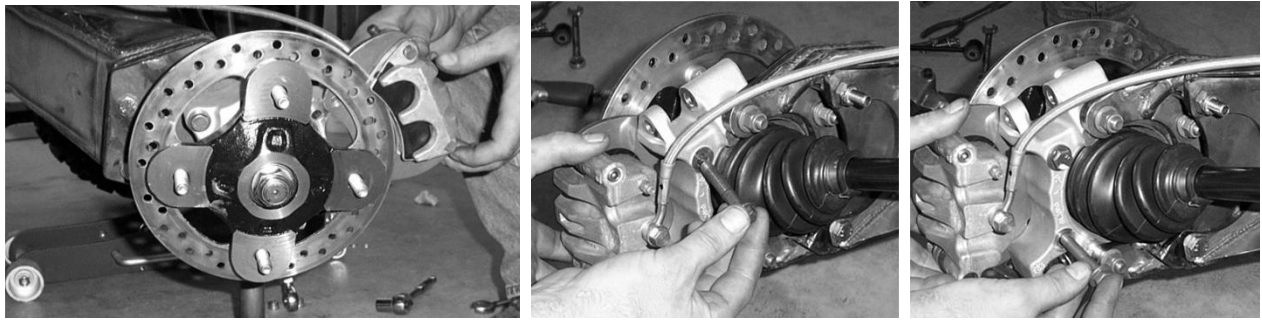


51. Next attached the factory sway bar link to the new trailing arm using the 10x55mm bolt and 10mm lock nut provided. Make sure it attaches to the inside of the trailing arm.

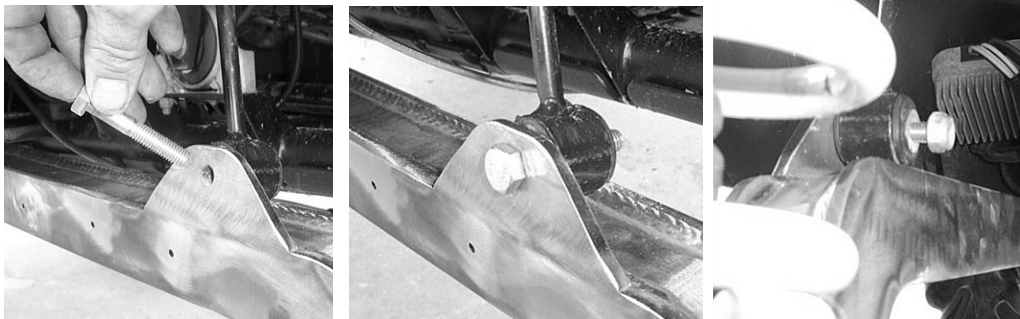


52. If you have done so already, attach the brake caliper and brake lines to the new trailing arm by using the factory P-clamp, additional P-clamps in the kit and Self-tapping screws provided into the holes already predrilled in the arms.

**NOTE: If you are using your factory trailing arms use the mounting locations from the factory and factory hardware.**

53. Attach the P-clamp to the trailing arm, making sure the brake line does not get pinched or cut during operation. There are predrilled holes in the arms to attach the P-clamps and you attach them using the #10-3/4" Tek self-tapping screws.

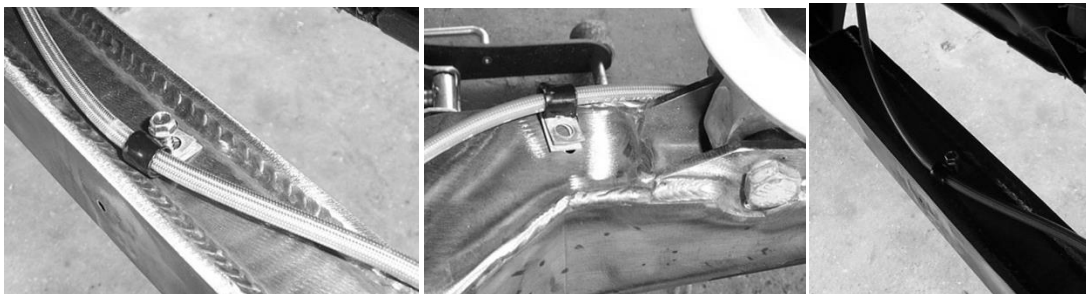


54. Attach the rear upper and lower radius bars to the knuckle assembly using the factory hardware.

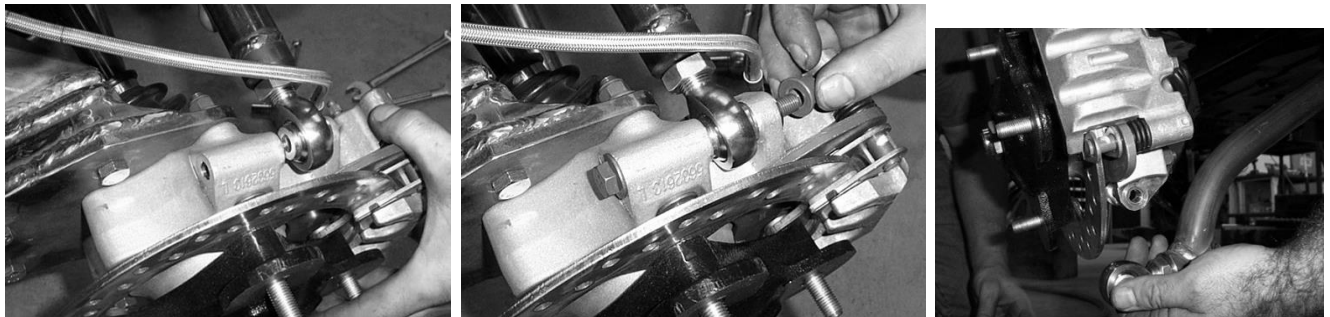



**NOTE: There are LEFT and RIGHT Lower Radius Bars!! On the end of the lower bar where the heim joint connects will have a slight turn on it. When mounted on the RZR they need to be mounted with the turn pointing towards the front of the RZR.**

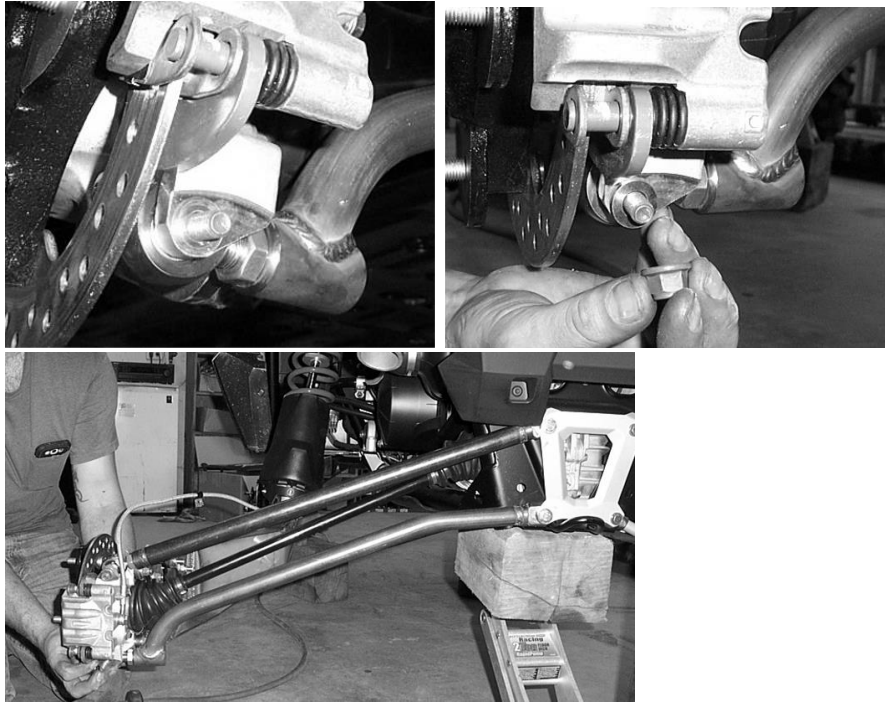


55. Repeat the steps for the opposite side.

56. Once you have completed both sides place the wheels back on the RZR and torque lugs to factory specifications.

### **SPECIAL INSTALLATION INSTRUCTIONS for HIGH LIFTER EDITION RZR 1000**

1. On the rear left side of the RZR there is a snorkel hose that when the lift kit is installed comes in contact with the shock.
2. Using the large zip tie provided in the kit, pull the hose back away from the shock and secure it to the frame.

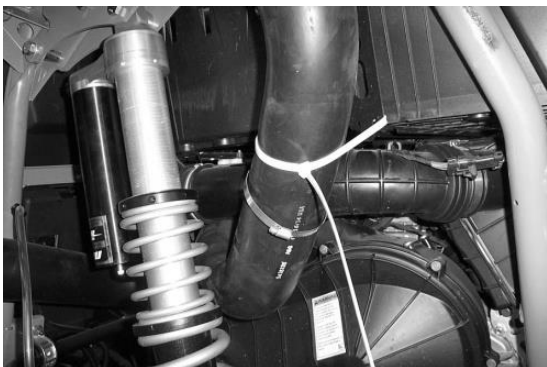



**This product has a dual warranty. The suspension components have a life time warranty and the axles have a limited replacement. Please see information on the following pages.**



### High Lifter Lifetime Warranty

From the beginning, High Lifter has engineered and manufactured some of the toughest, most durable products on the market. That's why this product comes with a Lifetime Warranty. It's our promise that High Lifter will never let you down.

- The **Lifetime Warranty** covers products sold to the original purchaser only and is not transferable. The term of the warranty is for the lifetime of the vehicle in question.
- Normal wear and tear items and finishes, such as, but not limited to: Heim joints, tie rod ends, ball joints, bearings, seals, bushings, bushing sleeves, zinc plating , powder coating, or chipping and discoloration of any finish is not covered.
- High Lifter will ship the replacement product after the returned product has been inspected by High Lifter staff.
- The warranty shall not include claims for damages, installation time or labor charges, economic losses, inconvenience, transportation, towing, down time, direct or indirect or consequential damages or delay resulting from any defect.
- The warranty does not apply to products that have been improperly applied or improperly installed.

### Making a warranty claim

1. All claims must be accompanied by the part and the original sales receipt or other acceptable proof of purchase from the original owner.
2. All warranties must be accompanied with a Return Merchandise Authorization (RMA) number. (Contact High Lifter at 318-524-2270 or 800-699-0947 for an RMA number)
3. When shipping the damaged product:
  - a. Write the RMA number on the outside of the box.
  - b. Also include the RMA number, proof of purchase and any notes inside the box.
  - c. Please keep your tracking number and shipment information.
4. The customer is responsible for shipping the product to High Lifter--return shipping within the lower 48 states will be paid by High Lifter products. With all warranty claims, only standard shipping services apply.
5. High Lifter will process your order within 24 business hours of receiving the returned item.
6. **Ship to:** High Lifter Products, 780 Professional Drive North, Shreveport, Louisiana 71105

**For axle warranty see additional information sheet!**

## High Lifter Outlaw DHT XL Big Lift Axle Warranty Program

Thank you for purchasing a High Lifter Products Big Lift equipped with a set of Outlaw DHT XL Big Lift Axles. Our axles have been engineered to provide superior performance for use on your ATV/UTV.

### LIMITED WARRANTY:

**HIGH LIFTER PRODUCTS, INC.** warrants to the **ORIGINAL** purchaser of any High Lifter Big Lift equipped with 4-Outlaw DHT XL Big Lift Axles for a total of one (1) axle warranty claim or breakage per set of 4 axles for a period of one (1) year from the original date of purchase. This warranty covers defects in material, workmanship or failure in normal service. This warranty is not for each individual axle, but for the set of (4).

Your 1-year warranty period starts from the date of original purchase. You are allowed 1 approved axle warranty claim or breakage during your 1-year warranty period. If there is additional DHT XL Big Lift axle breakage, you may follow our DHT XL Big Lift axle warranty claim process. This allows you to purchase a replacement High Lifter DHT XL Big Lift axle at a reduced price of \$75.00 per axle plus all applicable shipping charges. After your 1-year warranty expires, a replacement axle can be purchased at High Lifter's full standard published pricing.

The limited warranty is subject to the following conditions:

- a) The product is properly installed.
- b) If a lift kit requires or suggests the need for extended-length axles, those axles must meet requirements.
- c) **HIGH LIFTER** is not liable for any incidental or consequential damages to anything other than the axle covered by this warranty, including labor costs to remove/reinstall, loss of use of machine, loss of time, damage to housings, or damage to any OEM supplied parts.
- d) If the axle has been disassembled or modified by a third party, or has OEM parts installed on the axle, the warranty is null and void.
- e) Any axle damaged in a collision is excluded from this warranty.
- f) Warranty is non-transferable from the **ORIGINAL** purchaser.
- g) **HIGH LIFTER** reserves the right to inspect the axle and determine any defects in installation to determine the validity of a warranty's claim. This may include the ORIGINAL purchaser providing photographs of the ATV/UTV and its installed lift kit.
- h) Boots damaged by CV joint failures are covered under this warranty. Boots damaged by punctures or tears from trail obstructions are not covered under this warranty. Boot inspection should be a part of regular ATV/UTV maintenance.
- i) This warranty does not apply to and will not cover any products installed on vehicles used for any type of commercial use, rental use, lease use or ATV/UTV Racing.

### REFUSED SHIPMENTS/ORDER CANCELLATION:

Refused shipments are subject to a 25% restocking fee plus return freight. If a customer wishes to cancel an order (provided it is not a special order product), it is the responsibility of the customer to cancel the order prior to the product being shipped. If a customer cancels an order after product has been shipped, the refused shipment,

cancellation, or return will be subject to a 25% restocking fee and any freight charges incurred. For orders outside the United States, any fees associated with customs or duties are non-refundable.

**DAMAGED SHIPMENTS:**

All claims for damaged shipments must be made within 72 hours of delivery to the point of destination. Any damage to package should be noted with carrier at the time of delivery if possible. We will not be responsible for damage claims made over 72 hours after delivery to the point of destination.

**OBTAINING A WARRANTY CLAIM:**

All returns for warranty must be pre-approved by calling 1.800.699.0947.

After warranty approval has been granted and a Return Merchandise Authorization (RMA) number issued, the axle must be received by HIGH LIFTER PRODUCTS within 15 calendar days. The RMA number must be clearly displayed on the return box or the return will be refused. An RMA number does not imply warranty service, warranty replacement or a refund will be issued or provided on any product, but only that we will inspect the axle for warranty claims. For orders outside the United States, any fees associated with customs or duties are non-refundable.

All DHT XL Big Lift axles being considered for warranty repair or replacement must be returned to High Lifter for inspection and approval before a warranty claim can be processed. No replacement product will be sent before an axle with a pending warranty claim has properly went through our warranty claims process and has been received, inspected and approved for warranty by High Lifter. **All claims must be accompanied by a copy of the original sales receipt or invoice detailing date and place of purchase, as well as a written explanation of the problem, a valid phone contact number, and e-mail address. A copy of this original sales receipt or invoice must be included with EVERY axle being returned for warranty repair or replacement consideration.** The purchaser is responsible for all freight charges, taxes, duties or fees on a warranty claim, including incoming freight to High Lifter and return freight to the purchaser.

## High Lifter Products Outlaw DHT XL Big Lift Axle Warranty Claim

Name: \_\_\_\_\_

Address: \_\_\_\_\_

Phone Number: \_\_\_\_\_

E-Mail Address: \_\_\_\_\_

Axle Product Number: \_\_\_\_\_

Place of Purchase: \_\_\_\_\_

Date of Purchase: \_\_\_\_\_

Reason for Return: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**Reminder – This claim must be accompanied by a copy of the original receipt.**